




**DTS GmbH**  
Germany

03


## Boring Bars PCD, CVD-D, UltraDiamond, CBN




Tool and  
Mold Forming

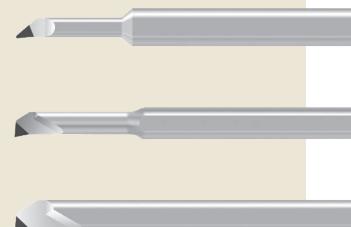


Automotive  
Mechanical Engineering

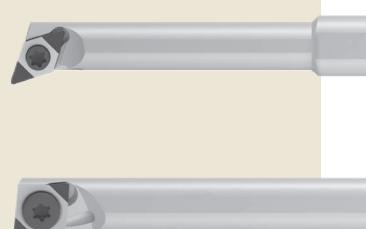

Medical Technology  
Microtechnology

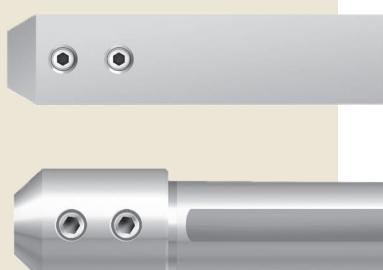

Aerospace

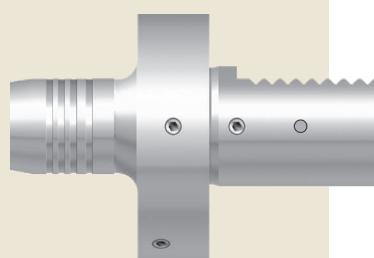

## About Us

Diamond Tooling Systems



### Welcome to DTS - Diamond Tooling Systems GmbH!

Based in Kaiserslautern - Germany - we have specialized in the development, production and distribution of precision tools equipped with ultrahard cutting materials, such as PCD (polycrystalline diamond), CVD-D (CVD thickfilm diamond), UltraDiamond (monocrystalline binderless diamond) and CBN (cubic boron nitride). As a leading manufacturer for tools with laser cutting edges, we offer machining solutions in the areas of turning, milling, grooving, drilling, reaming, threading, and tool holding.

To be able to economically process ultra-hard cutting materials such as PCD, CVD-D and CBN on precision tools we realized early on that we would have to move away from the traditional production technology of „grinding“ to new technologies such as the „laser removal process“. This decision has contributed to the fact that our customers regard us, DTS GmbH, as the pioneer and leading manufacturer of laser tools for machining.

Ultra-hard high-performance cutting materials have a key function in metal-cutting manufacturing. Precision tools equipped with ultra-hard cutting materials are products that require a great deal of explanation. The economical use of the cutting materials is only ensured if the machining process and the cutting material are coordinated with each other.

This is exactly where we at DTS - Diamond Tooling Systems GmbH - step in: Tools and processes are subjected to a comprehensive analysis by our experienced application engineers. Subsequently, the new process optimization is presented to the customer and in the next step, it is implemented in their production. Only in that way is it possible to exploit the optimum potential of our high-tech cutting materials.

Our experienced application engineers are also available to advise you during ongoing production. This close cooperation and mutual trust is the basis of our success.

With more than 25 years of optimization experience in the processing industry, this is where we see our strength!

## Contents

Boring Bars

### Overview

Ultrahard Cutting Materials at a Glance .....	04
Our Cutting Materials PCD, CVD-D, UltraDiamond and CBN at a Glance .....	06
Our Cutting Material Assignment according to Material use .....	08

### Products

Our Precision Boring Tools at a Glance .....	10
Application Possibilities of our Boring Tools .....	11
Boring Bars - Type BS .....	12
Boring Bars - Type BE .....	16

ISO Code .....	18
----------------	----

MiniTools, CVD-D, UltraDiamond and CBN Indexable Inserts .....	19
E... SCLDR/L 95° / 5° .....	21
E... SDQCR/L 107,5 ° / 17,5° .....	24
E... SDUCR/L 93° / 32° .....	25
E... SELPR/L 95° / 10° .....	26
E... SRLCR/L 95° / 10° .....	27
E... STXPR/L 62,5° / 57,5° .....	28
E... SVXCR/L 5° / 140° .....	29
E... SVXCR/L 113° / 32° .....	30
E... SVLCR/L 95° / 50° .....	31
E... SVVCR 72,5° / 72,5° .....	32
E... SVLXR/L 50° / 95° .....	33
E... SWUCR/L 93° / 7° .....	34

Clamping Systems at a Glance .....	36
------------------------------------	----

Hydraulic Expansion Chuck .....	38
Clamping Adapter .....	40

### Technical Attachment

Cutting Parameters .....	42
Formulas .....	46
Copyright and Safety Instructions .....	51




You can also get all of our products via our online shop - anytime, fast and easy.  
[www.diamond-tools24.com](http://www.diamond-tools24.com)

# PASSION FOR DIAMOND...

ultrahard cutting materials at a glance



... is not just a slogan for us - we live this passion in our daily dealings with our customers and we are your partner when it comes to diamond or CBN tools.

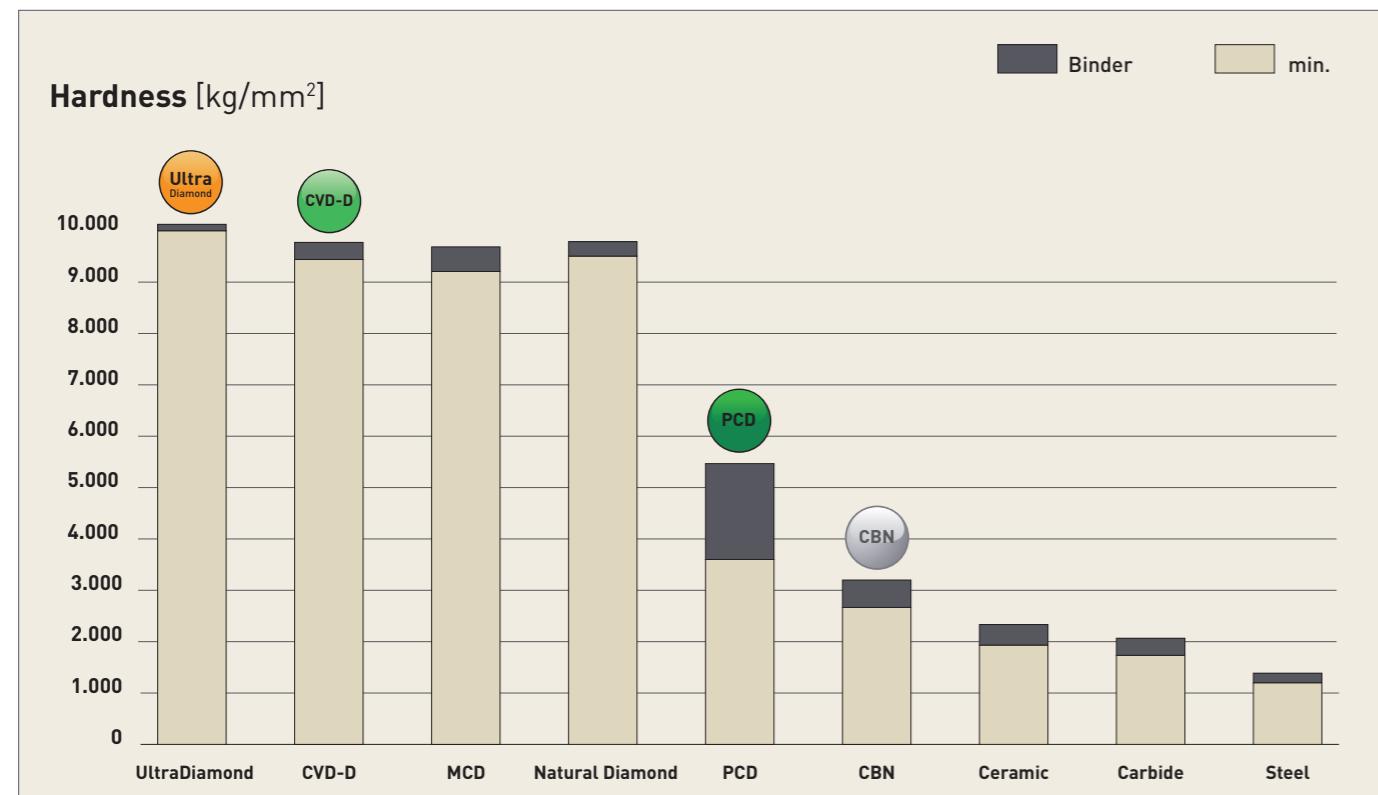

## CVD-Thickfilm Diamond (CVD-D)

The Star among Diamond Cutting Materials

For the machining of hard-brittle materials such as Ceramics, glass, glass-Ceramics, tungsten Carbide, MMC and fiber-reinforced composites such as CFRP and GFRP. Due to the lack of a bonding matrix, the diamond content is much higher than with PCD. In the group of ultra-hard cutting materials, binderless CVD-D is one of the hardest man-made diamond cutting materials.

CVD-D is characterized by high hardness as well as high wear resistance. These properties make CVD-D the perfect cutting material for machining abrasive materials. Compared to PCD, which is damaged by the abrasive particles due to its soft metallic binder phase, the CVD-D cutting edge remains stable due to its binderless anchoring in the diamond matrix.

With the correct use of CVD-D, the tool life can be increased by up to 10 times (and even more) compared to PCD!

## Binderless Diamond (UltraDiamond)

The hardest Mono Crystal

Single-crystal elements are laser-cut from diamond blanks in a defined orientation using laser segmentation technology. This new technology makes it possible, in addition to polycrystalline cutting materials such as PCD and CVD-D, to also braze a monocrystal (UltraDiamond) under high vacuum on any tool carrier. Compared to PCD, the tool life can be increased by approx. 15 to 25 times and compared to CVD-D by approx. 2 to 5 times.

The areas of application are similar to PCD and CVD-D, but this monocrystalline cutting material offers a further significant increase in tool life in all applications where PCD and CVD-D reach the limits of economic viability. The UltraDiamond cutting material makes economical machining of very hard, highly brittle materials such as Ceramics, glass, glass-Ceramics and hard metals with low cobalt binder and nickel binder (<10%) possible.

## Polycrystalline diamond (PCD)

The well-known Standard Diamond

PCD is a synthetically produced, extremely tough, intergrown mass of diamond particles with a random orientation in a metal matrix. It is produced by sintering selected diamond particles under high pressure and high temperatures.

Graphite serves as a catalyst allowing the PDC crystals to intergrow. PCD has a high thermal conductivity and good heat dissipation away from the cutting edge. In addition, PCD has the highest bending fracture strength of all cutting materials.

PCD is very well suited for machining aluminum with a Si content of up to 10% and/or other abrasive fillers. The thermal hardness is about 750°C. The areas of application are like those of CVD thick-film diamond, but CVD thick film has a higher cost effectiveness with hard-brittle materials or aluminum from a Si content of 10%.

## Polycrystalline Cubic Boron Nitride (CBN)

Chemically resistant and stable at high temperatures

of up to 1,400°C. Boron nitride powder is the starting point for the production of CBN, which has been available since the end of the 1960s. It is produced under high pressure and at temperatures of over 1,500°C and the many different substrates are specifically adapted to the final application.

CBN is now considered the second hardest material after diamond cutting materials!

The applications of CBN take place in the automotive industry, aerospace, tool and die and mold making as well as in mechanical engineering. The wide range as cutting and abrasive material includes hardened steels, cast irons, chilled cast iron, sintered materials, stellites, nickel- and cobalt-based superalloys. In many applications, cubic boron nitride is preferred to diamond cutting materials because it is absolutely stable in air at temperatures up to 1,400°C. Diamond, on the other hand, begins to decompose at a temperature of approx. 750°C. Compared to PCD, CBN is also characterized by its chemical resistance to ferrous materials.

# Our Cutting Materials

and their main applications at a glance

We want to offer you the ideal solution for your application. Therefore, we have developed four main cutting material groups, specially adapted to the requirements of the different materials.

Below you will find an overview of the different groups.

## PCD

is ideally suited for the machining of \*

Aluminum <10% Si | Brass | Copper, Copper Alloys | Graphite |  
Magnesium | PEEK | Tungsten alloy

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## PCD

is ideally suited for the machining of \*

Aluminum <10% Si | Brass | Copper, Copper Alloys | Graphite |  
Magnesium | PEEK | Tungsten alloy

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## CVD-D

is ideally suited for the machining of \*

Acrylic (PMMA) | Aluminum >10% Si | Carbide | Ceramics |  
Composites (GFRP/CFRP) | Copper, Copper Alloys | Glass, Glass Ceramic |  
Magnesium | Plastic | Silver, Gold, Platinum | Titanium | Zirconium

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## CVD-D

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## UltraDiamond

is ideally suited for the machining of \*

Acrylic (PMMA) | Carbide | Ceramic | Glass, Glass Ceramic

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## Ultra Diamond

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## CBN-H

is ideally suited for the machining of \*

Steel, hardened up to 72 HRC  
Sinter Steel, hardened

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## H

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## CBN-K

is ideally suited for the machining of \*

Grey Cast Iron (GCI)  
Ductile Cast Iron (DCI)

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## K

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## CBN-X

is ideally suited for the machining of \*

Powder metallurgical Steel, hardened  
Special Alloys such as ASP, CPM, Hardox  
Tool Steel, hardened up to 72 HRC

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

## X

-  continuous cut
-  light interrupted cut
-  heavy interrupted cut

# Your Notes


# Our Cutting Materials Assignment

about the materials

Benefit from over 25 years of application experience with ultra-hard cutting materials.

In the table you will find our cutting material recommendation for each material.

ISO	Material	Green ✓		First choice					
		PCD	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K		
<b>H</b>	Powder metallurgical Steel, hardened				✓	✓			
	Special Alloys (ASP, CPM, Hardox)				✓	✓			
	Steel, hardened up to 72 HRC				✓	✓			
	Tool Steel, hardened up to 72 HRC				✓	✓			
<b>P</b>	Sintered Steel					✓		✓	
	Sintered Steel, hardened				✓	✓			
<b>K</b>	Grey Cast Iron (GCI)						✓		
	Ductile Cast Iron (DCI)					✓	✓		
	Shell Chilled Cast Iron				✓	✓			
<b>S</b>	Ni-, Co-, Fe- and Cr-Alloys				✓	✓			
	Titanium Alloys				✓	✓			
<b>M</b>	Stainless Steel, hardened				✓	✓			
	Acrylic (PMMA)			✓	✓				
<b>N</b>	Aluminum, < 10% Si	✓		✓					
	Aluminum, > 10% Si	✓		✓					
	Brass	✓		✓					
	Carbide G-Grade, < 15% Co			✓	✓				
	Carbide G-Grade, > 15% Co			✓					
	Carbide K-Grade, < 15% Co			✓	✓				
	Carbide K-Grade, > 15% Co			✓					



You cannot find your material in the table?

If you have any further technical questions, please do not hesitate to contact us by phone or e-mail!

Phone: +49(0)6301 32011-0

Mail: [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

ISO	Material	PCD	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
<b>N</b>	Carbide (Green)	✓					
	Carbide with Ni Binder						✓
	Ceramics				✓	✓	
	Ceramics (Green)	✓					
	Composite such as CFRP/GFRP	✓	✓				
	Copper, Copper Alloys	✓	✓				
	Glass, Glass Ceramic			✓	✓		
	Graphite	✓	✓				
	Magnesium	✓	✓				
	MMC			✓	✓		
	Plastics			✓			
	PEEK	✓	✓				
	Silver, Gold, Platinum			✓	✓		
	Tungsten alloy	✓	✓				
	Zirconium			✓	✓		



Special tools on request for you!

Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)



All our products are also available in the online shop.

Visit us at [diamond-tools24.com](http://diamond-tools24.com)



# Boring Bars

brazed cutting edge for internal machining from Dmin 1,00 mm

## Type BS

Dmin	F	L2	L1	R	D2	$t_x$	$\delta$	Version	PCD	CVD-D	CBN
									Item No.	Item No.	Item No.
1,00	0,50	3,00	72,00	0,10	4h6	0,05	2°	right	BS2050-1002	BS3550-1002	
								left	BS2050-1003	BS3550-1003	
	0,50	10,00	80,00	0,10	4h6	0,05	2°	right	BS1050-0000	BS2050-0000	BS3550-0000
								left	BS1050-0001	BS2050-0001	BS3550-0001
1,50	0,75	3,00	71,00	0,10	4h6	0,15	2°	right	BS2050-1007	BS3550-1007	
								left	BS2050-1008	BS3550-1008	
	0,75	6,00	74,00	0,10	4h6	0,15	2°	right	BS2050-1005	BS3550-1005	
								left	BS2050-1006	BS3550-1006	
	0,75	15,00	80,00	0,10	4h6	0,15	2°	right	BS1050-0005	BS2050-0005	BS3550-0005
								left	BS1050-0006	BS2050-0006	BS3550-0006
2,00	1,00	6,00	74,00	0,10	4h6	0,17	2°	right	BS2050-1012	BS3550-1012	
								left	BS2050-1013	BS3550-1013	
	1,00	6,00	74,00	0,20	4h6	0,17	2°	right	BS2050-2012	BS3550-2012	
								left	BS2050-2013	BS3550-2013	
	1,00	10,00	80,00	0,10	4h6	0,17	2°	right	BS1050-0010	BS2050-0010	BS3550-0010
								left	BS1050-0011	BS2050-0011	BS3550-0011

Figure shows right version

Dmin	F	L2	L1	R	D2	$t_x$	$\delta$	Version	PCD	CVD-D	CBN
Item No.	Item No.	Item No.									
2,50	1,25	6,00	74,00	0,10	4h6	0,25	10°	right	BS2050-1022	BS3550-1022	
								left	BS2050-1023	BS3550-1023	
	1,25	6,00	74,00	0,20	4h6	0,25	10°	right	BS2050-2022	BS3550-2022	
								left	BS2050-2023	BS3550-2023	
	1,25	10,00	80,00	0,10	4h6	0,25	10°	right	BS1050-0020	BS2050-0020	BS3550-0020
								left	BS1050-0021	BS2050-0021	BS3550-0021
	1,50	6,00	74,00	0,10	4h6	0,33	10°	right	BS2050-1028	BS3550-1028	
								left	BS2050-1029	BS3550-1029	
	1,50	10,00	78,00	0,10	4h6	0,33	10°	right	BS2050-2028	BS3550-2028	
								left	BS2050-2029	BS3550-2029	
	1,50	10,00	78,00	0,20	4h6	0,33	10°	right	BS1050-1026	BS2050-1026	BS3550-1026
								left	BS1050-2027	BS2050-2027	BS3550-2027
	1,50	15,00	83,00	0,10	4h6	0,33	10°	right	BS1050-1024	BS2050-1024	BS3550-1024
								left	BS1050-1025	BS2050-1025	BS3550-1025
	1,50	15,00	83,00	0,20	4h6	0,33	10°	right	BS1050-2024	BS2050-2024	BS3550-2024
								left	BS1050-2025	BS2050-2025	BS3550-2025
	1,75	6,00	74,00	0,10	4h6	0,35	10°	right	BS2050-1032	BS3550-1032	
								left	BS2050-1033	BS3550-1033	
	1,75	6,00	74,00	0,20	4h6	0,35	10°	right	BS2050-2032	BS3550-2032	
								left	BS2050-2033	BS3550-2033	
	1,75	10,00	78,00	0,10	4h6	0,35	10°	right	BS2050-1034	BS3550-1034	
								left	BS2050-1035	BS3550-1035	
	1,75	10,00	78,00	0,20	4h6	0,35	10°	right	BS2050-2034	BS3550-2034	
								left	BS2050-2035	BS3550-2035	
	1,75	15,00	80,00	0,10	4h6	0,35	10°	right	BS1050-0030	BS2050-0030	BS3550-0030
								left	BS1050-0031	BS2050-0031	BS3550-0031
	1,75	15,00	83,00	0,20	4h6	0,35	10°	right	BS1050-2030	BS2050-2030	BS3550-2030
								left	BS1050-2031	BS2050-2031	BS3550-2031
	1,75	21,00	89,00	0,10	4h6	0,35	10°	right	BS1050-1036	BS2050-1036	BS3550-1036
								left	BS1050-1037	BS2050-1037	BS3550-1037
	1,75	21,00	89,00	0,20	4h6	0,35	10°	right	BS1050-2036	BS2050-2036	BS3550-2036
								left	BS1050-2037	BS2050-2037	BS3550-2037

### Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- CBN Steel hardened up to 72 HRC, Tool Steel up to 72 HRC, powder metallurgical Steel ...

Suitable clamping adapters can be found from page 36 onwards.

You will find further application ranges in the detailed overview from page 8.



Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)




All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

# Boring Bars

brazed cutting edge for internal machining from Dmin 4,00 mm

## Type BS

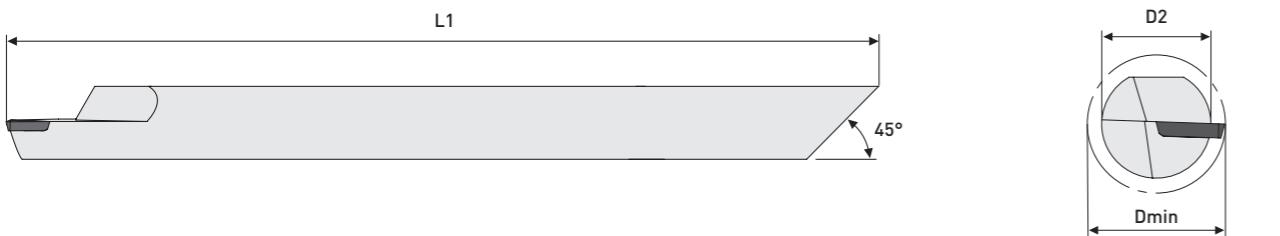

Dmin	F	L2	L1	R	D2	t <sub>x</sub>	δ	Version	Item No.	Item No.	Item No.	
<b>4,00</b>	2,00	10,00	78,00	0,10	4h6	0,30	10°	right	BS2050-1132	BS3550-1132		
								left	BS2050-1133	BS3550-1133		
	2,00	10,00	78,00	0,20	4h6	0,30	10°	right	BS2050-2132	BS3550-2132		
								left	BS2050-2133	BS3550-2133		
	2,00	15,00	80,00	0,10	4h6	0,30	10°	right	BS1050-1140	BS2050-1140	BS3550-1140	
								left	BS1050-1141	BS2050-1141	BS3550-1141	
	2,00	15,00	83,00	0,20	4h6	0,30	10°	right	BS1050-2130	BS2050-2130	BS3550-2130	
								left	BS1050-2131	BS2050-2131	BS3550-2131	
	2,00	21,00	89,00	0,10	4h6	0,30	10°	right	BS1050-1134	BS2050-1134	BS3550-1038	
								left	BS1050-1135	BS2050-1135	BS3550-1039	
	2,00	21,00	89,00	0,20	4h6	0,30	10°	right	BS1050-2134	BS2050-2134	BS3550-2038	
								left	BS1050-2135	BS2050-2135	BS3550-2039	
<b>4,50</b>	2,25	-	78,00	0,10	4h6	0,25	10°	right	BS2050-1230	BS3550-1240		
								left	BS2050-1231	BS3550-1241		
		2,25	-	78,00	0,20	4h6	0,25	10°	right	BS2050-2230	BS3550-2240	
									left	BS2050-2231	BS3550-2241	
		2,25	-	83,00	0,10	4h6	0,25	10°	right	BS1050-1232	BS2050-1232	BS3550-1242
									left	BS1050-1233	BS2050-1233	BS3550-1243
		2,25	-	83,00	0,20	4h6	0,25	10°	right	BS1050-2232	BS2050-2232	BS3550-2242
									left	BS1050-2233	BS2050-2233	BS3550-2243
		2,25	-	89,00	0,10	4h6	0,25	10°	right	BS2050-1234	BS3550-1244	
									left	BS2050-1235	BS3550-1245	
	2,25	-	89,00	0,20	4h6	0,25	10°	right	BS2050-2234	BS3550-2244		
								left	BS2050-2235	BS3550-2245		

### Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- CBN Steel hardened up to 72 HRC, Tool Steel up to 72 HRC, powder metallurgical Steel ...

Suitable clamping adapters can be found from page 36 onwards.

You will find further application ranges in the detailed overview from page 8.

Dmin	F	L2	L1	R	D2	t <sub>x</sub>	δ	Version	Item No.	Item No.	Item No.
<b>5,00</b>	2,50	-	80,00	0,10	4h6	0,50	10°	right	BS2050-1240	BS3550-1040	
								left	BS2050-1241	BS3550-1041	
								right	BS1050-2040	BS2050-2040	BS3550-2040
								left	BS1050-2041	BS2050-2041	BS3550-2041
<b>6,00</b>	3,00	-	100,00	0,10	5h6	0,50	10°	right	BS2050-1050	BS3550-1050	
								left	BS2050-1051	BS3550-1051	
								right	BS1050-2050	BS2050-2050	BS3550-2050
								left	BS1050-2051	BS2050-2051	BS3550-2051
<b>7,00</b>	3,50	-	100,00	0,20	6h6	0,50	10°	right	BS1050-2060	BS2050-2060	BS3550-2060
								left	BS1050-2061	BS2050-2061	BS3550-2061
								right	BS1050-4060	BS2050-4060	BS3550-4060
								left	BS1050-4061	BS2050-4061	BS3550-4061
<b>9,00</b>	4,50	-	100,00	0,20	8h6	0,50	10°	right	BS1050-2080	BS2050-2080	BS3550-2080
								left	BS1050-2081	BS2050-2081	BS3550-2081
								right	BS1050-4080	BS2050-4080	BS3550-4080
								left	BS1050-4081	BS2050-4081	BS3550-4081



Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)



All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

# Boring Bars

brazed cutting edge for internal machining from Dmin 3,60 mm

## Type BE



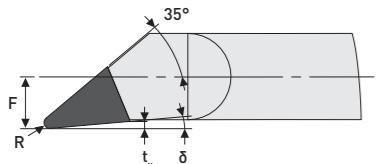


Figure shows right version

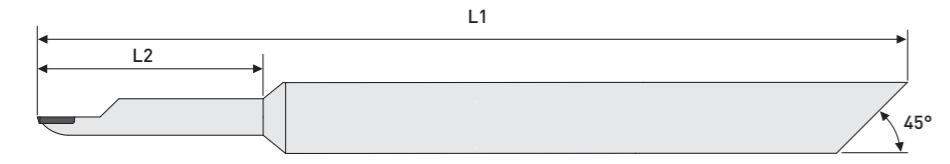

Dmin	F	L2	L1	R	D2	$t_x$	$\delta$	Version	Item No.	Item No.	Item No.
3,60	1,80	10,00	100,00	0,20	6h6	0,30	5°	right		BE2050-2130	BE3550-2130
								left		BE2050-2131	BE3550-2131
	1,80	18,00	100,00	0,20	6h6	0,30	5°	right		BE2050-2030	BE3550-2030
								left		BE2050-2031	BE3550-2031
7,00	3,50	-	100,00	0,20	6h6	0,50	5°	right		BE2050-2060	BE3550-2060
								left		BE2050-2061	BE3550-2061
	3,50	-	100,00	0,40	6h6	0,50	5°	right		BE2050-4060	BE3550-4060
								left		BE2050-4061	BE3550-4061

### Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- CBN Steel hardened up to 72 HRC, Tool Steel up to 72 HRC, powder metallurgical Steel ...

## Your Notes

## Shank specification

E 08 X S C L C R 06

**A** Steel shank  
with internal cooling


**C** Carbide shank

**E** Carbide shank  
with internal cooling

**S** Steel shank

## Shank diameter [mm]

E 08 X S C L C R 06



(08) = 8 mm  
(10) = 10 mm

(12) = 12 mm  
(16) = 16 mm

(20) = 20 mm  
(25) = 25 mm

(32) = 32 mm  
(40) = 40 mm

(50) = 50 mm  
(60) = 60 mm

## Tool length L1 [mm]


E 08 X S C L C R 06



(F) = 80 mm (L) = 140 mm (P) = 170 mm (S) = 250 mm (V) = 400 mm (X) = Special  
(H) = 100 mm (M) = 150 mm (Q) = 180 mm (T) = 300 mm (W) = 450 mm  
(K) = 125 mm (N) = 160 mm (R) = 200 mm (U) = 350 mm (Y) = 500 mm






## Clamping system

E 08 X S C L C R 06






## Insert shape

E 08 X S C L C R 06










## Approach angle

E 08 X S C L C R 06



## Insert clearance angle

E 08 X S C L C R 06






## Hand of tool

E 08 X S C L C R 06



## Cutting edge length [mm]

E 08 X S C L C R 06




## MiniTools

equipped with multi-edged Diamond or CBN inserts

### Boring Tools with Carbide Tool Holders for Mini Inserts :

- ✓ Highly economical due to multi-edged inserts
- ✓ Starting from bore Ø 3,5mm
- ✓ Low vibration carbide design
- ✓ With inner cooling
- ✓ For internal turning on lathes
- ✓ For spindle turning on milling machines



E-SCLDR/L




E-SCLDR/L



E-SDQCR/L



E-SELPR/L



E-SRLCR/L



E-SVLXR/L



E... STXPR/L



E-SWUCR/L

### Large selection of multi-edged indexable inserts!

#### Application range of our diamond indexable inserts:

- ✓ All abrasive non-ferrous materials
- ✓ Aluminum
- ✓ Carbide G-Grade
- ✓ Carbide K-Grade
- ✓ Carbide with Ni Binder
- ✓ Ceramic Materials
- ✓ Composite such as CFRP / GFRP
- ✓ Copper Alloys
- ✓ Glass and Glass Ceramic
- ✓ MMC
- ✓ Other brittle non-ferrous materials
- ✓ Titanium (Finishing)

CDGW 03 ...  
FullFace (Z1)

Z2

DCGW 05 ...  
Z2

EPGW 05 ...  
Z2

TPGW 06 ...  
Z1

VCGW 05 ...  
Z2

WCGW 02 ...  
Z3



from Dmin 3,50



from Dmin 4,80



from Dmin 5,20



from Dmin 8,00



from Dmin 8,00





from Dmin 8,00



from Dmin 5,80

Inserts available with radii from 0.10 mm to 0.40 mm.

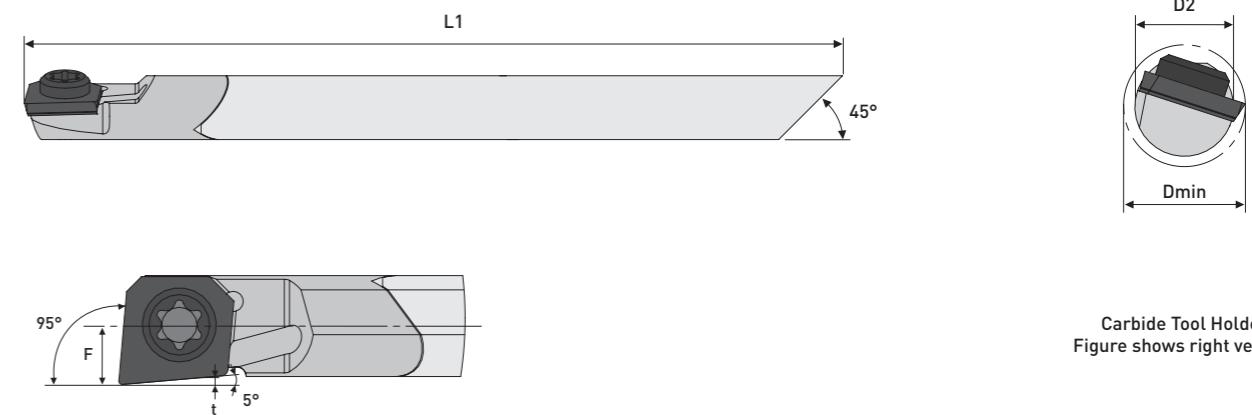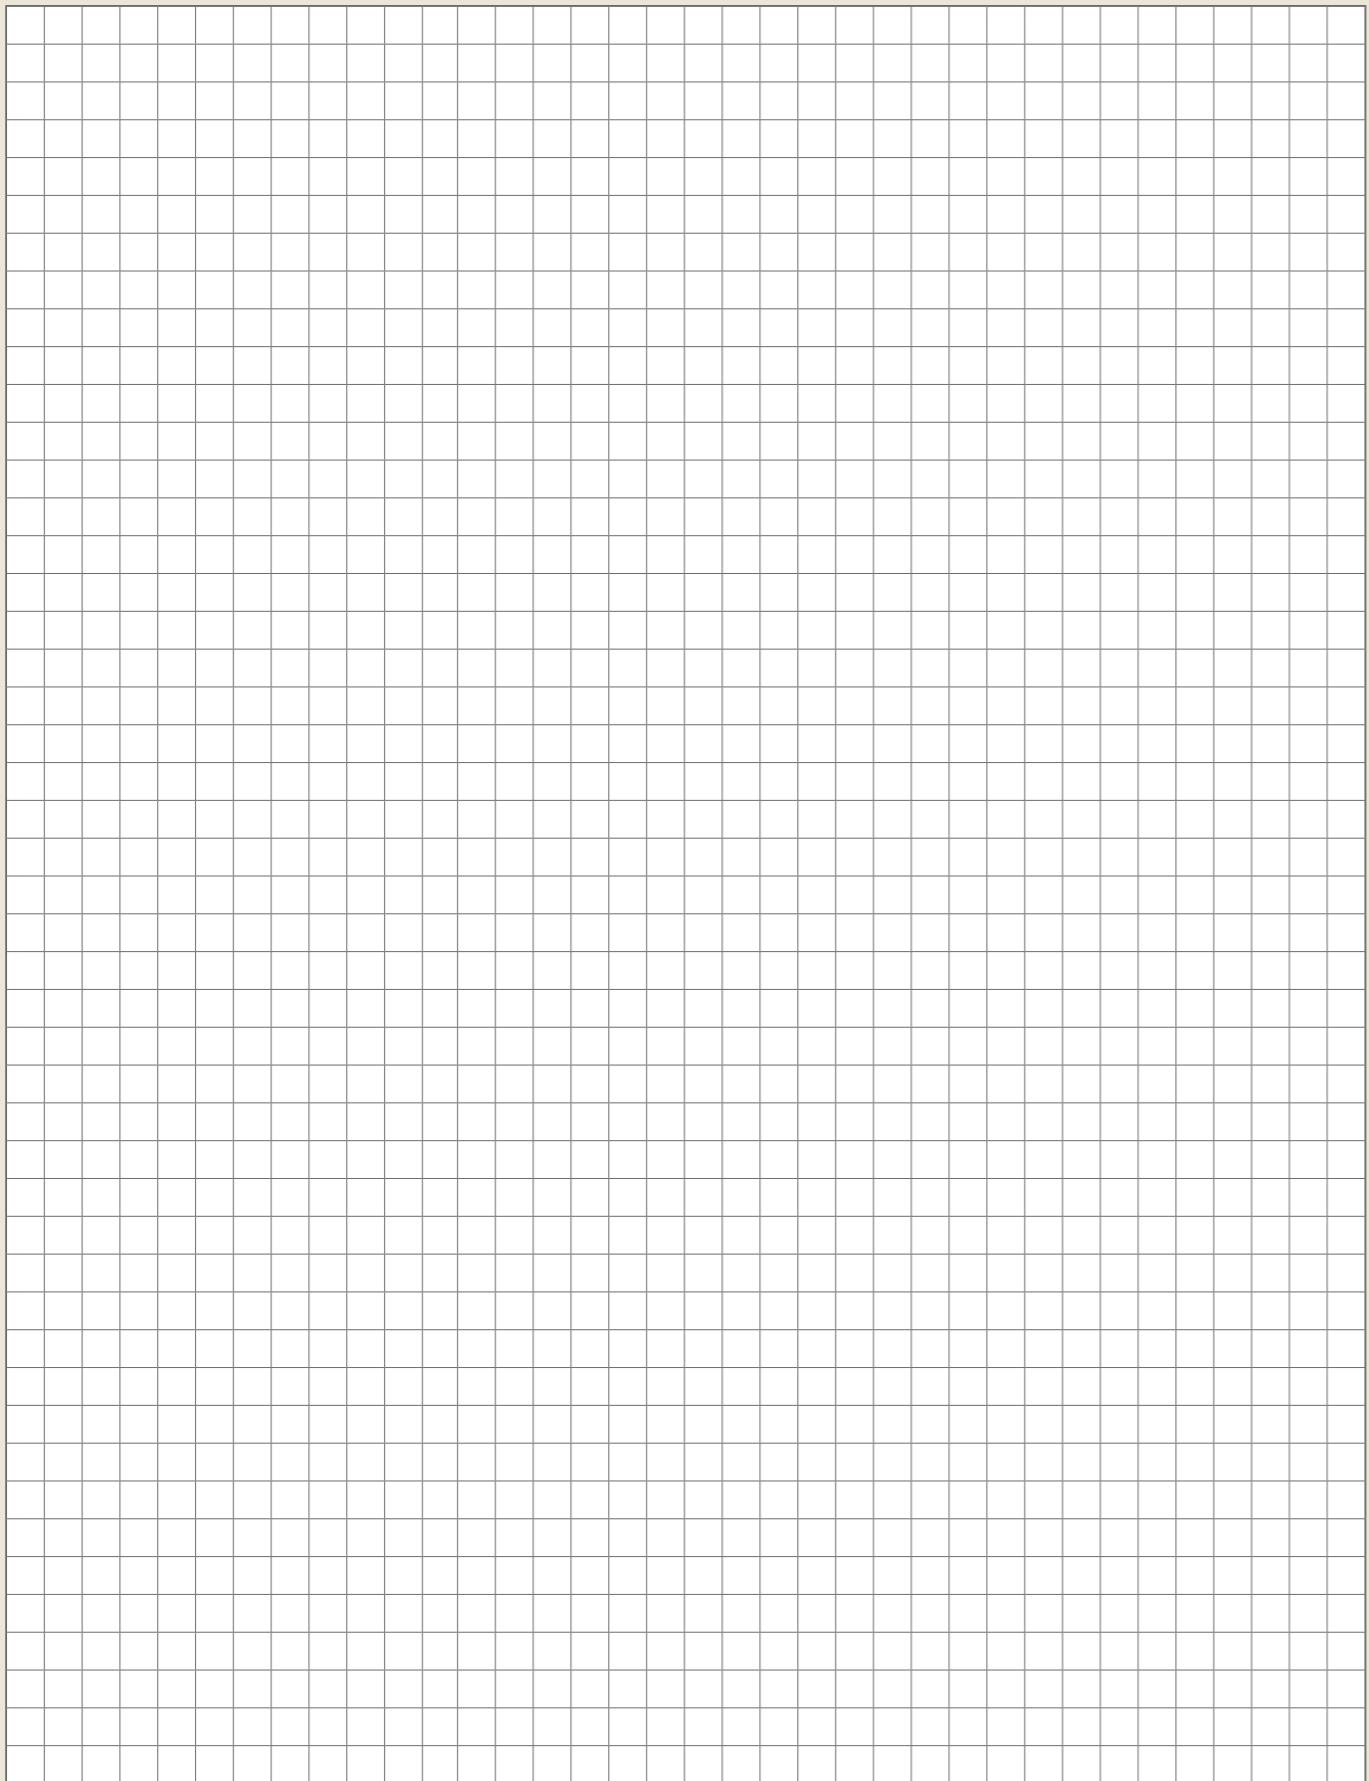

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	New	Item No.
3,50	1,75	-	80,00	3h6	0,20	right	E03X SCLDR 03		BW6060-0234
						left	E03X SCLDL 03		BW6060-0235

 Matching clamping screw: 01-KL9060-0016

Iso Code	IC	S	R	Figure shows right version FullFace		CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
				Item No.	New	Item No.	Item No.	Item No.	Item No.	Item No.
CDGW 03X101-Right	3,20	0,63	0,10	DP2030-0500		-	TI5030-0500	TI5930-0500	TI5530-0500	
CDGW 03X102-Right	3,20	0,63	0,20	DP2030-0502		-	TI5030-0502	TI5930-0502	TI5530-0502	
CDGW 03X101-Left	3,20	0,63	0,10	DP2030-0501		-	TI5030-0501	TI5930-0501	TI5530-0501	
CDGW 03X102-Left	3,20	0,63	0,20	DP2030-0503		-	TI5030-0503	TI5930-0503	TI5530-0503	

**Application range:**
● CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...

● Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...



● CBN-H Steel hardened up to 72 HRC

● CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...

● CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

# E... SCLDR/L 95°/5°



for inserts CDGW 0401...

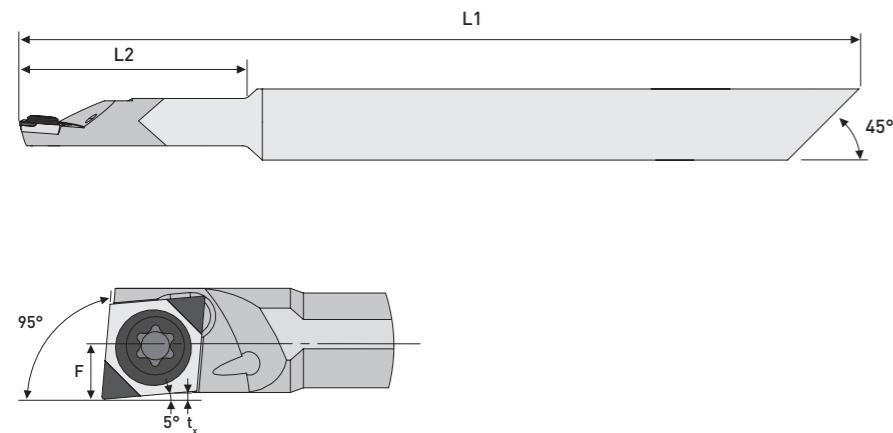

Carbide Tool Holder  
Figure shows right version

# E... SCLDR/L 95°/5°

for inserts CDGW 0401...

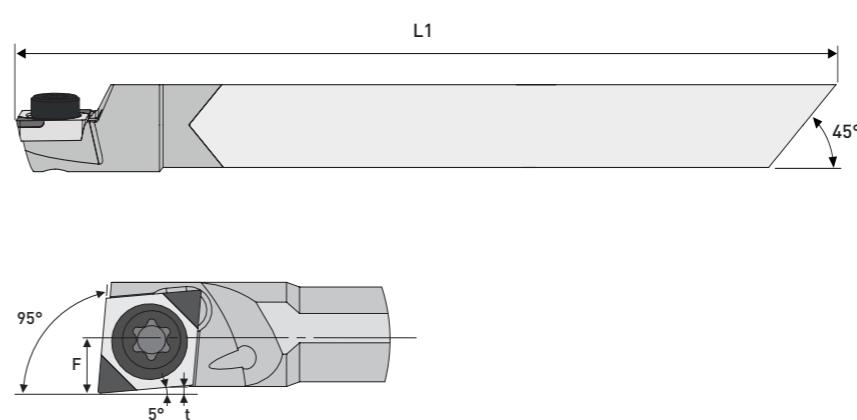

Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
4,80	2,50	24,00	80,00	4h6	0,30	right	E0408X SCLDR 04	BW6060-0130
						left	E0408X SCLDL 04	BW6060-0131
5,80	2,90	21,50	100,00	5h6	0,40	right	E0508X SCLDR 04	BW6060-0132
						left	E0508X SCLDL 04	BW6060-0133
6,80	3,40	22,00	100,00	6h6	0,40	right	E0608X SCLDR 04	BW6060-0134
						left	E0608X SCLDL 04	BW6060-0135

Matching clamping screw: 01-BW9060-0011

Iso Code	IC	S	R	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
				Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No. <small>New</small>
CDGW 040101	3,97	1,00	0,10	DP2010-0511	DP1110-1480	TI5010-1511	TI5910-2510	TI5510-2510
CDGW 040102	3,97	1,00	0,20	DP2010-0512	DP1110-1482	TI5010-1512	TI5910-2512	TI5510-2512
CDGW 040104	3,97	1,00	0,40	DP2010-0513	DP1110-1484	TI5010-1513	TI5910-2514	TI5510-2514

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
4,80	2,50	-	80,00	4h6	0,30	right	E04X SCLDR 04	BW6060-0120
						left	E04X SCLDL 04	BW6060-0121
5,80	2,90	-	100,00	5h6	0,40	right	E05X SCLDR 04	BW6060-0122
						left	E05X SCLDL 04	BW6060-0123
6,80	3,40	-	100,00	6h6	0,40	right	E06X SCLDR 04	BW6060-0124
						left	E06X SCLDL 04	BW6060-0125

Matching clamping screw: 01-BW9060-0011

Iso Code	IC	S	R	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
				Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No. <small>New</small>
CDGW 040101	3,97	1,00	0,10	DP2010-0511	DP1110-1480	TI5010-1511	TI5910-2510	TI5510-2510
CDGW 040102	3,97	1,00	0,20	DP2010-0512	DP1110-1482	TI5010-1512	TI5910-2512	TI5510-2512
CDGW 040104	3,97	1,00	0,40	DP2010-0513	DP1110-1484	TI5010-1513	TI5910-2514	TI5510-2514

## Application range:

- CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...
- Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...
- CBN-H Steel hardened up to 72 HRC
- CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

Suitable clamping adapters can be found from page 36 onwards.

You will find further application ranges in the detailed overview from page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)




All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or  
in our online shop.

Subject to technical changes.

## E... SDQCR/L 107,5°/17,5°

for inserts DCGW 04T0...


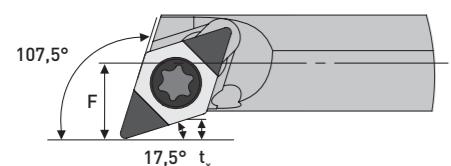
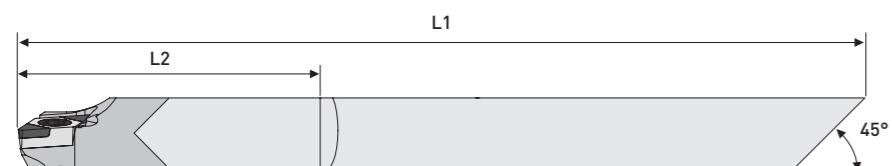


Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
5,20	3,00	25,00	100,00	5h6	1,10	right	E0405X SDQCR 04	BW6060-0166
						left	E0405X SDQCL 04	BW6060-0167

## E... SDUCR/L 93°/32°

for inserts DCGW 04T0...

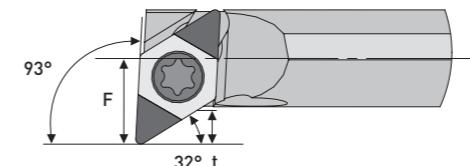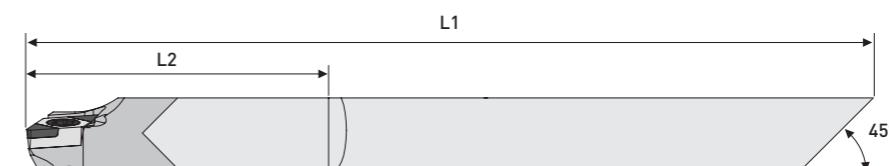



Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
5,60	3,00	25,00	100,00	5h6	1,50	right	E0405X SDUCR 04	BW6060-0160
						left	E0405X SDUCL 04	BW6060-0161

 Matching clamping screw: 01-BW9060-0010

 Matching clamping screw: 01-BW9060-0010

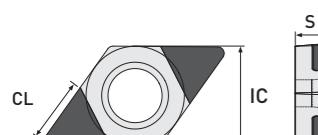	CL	IC	S	R	CL 2,00 mm 2-edge tipped	 CVD-D	 Ultra Diamond	 CBN-H	 CBN-X	 CBN-K
Iso Code	IC	S	R		Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>
DCGW 04T001	3,10	1,20	0,10		DP2010-0521	DP1110-1492	TI5010-1521	TI5910-2522	TI5510-2522	
DCGW 04T002	3,10	1,20	0,20		DP2010-0522	DP1110-1494	TI5010-1522	TI5910-2524	TI5510-2524	
DCGW 04T004	3,10	1,20	0,40		DP2010-0523	DP1110-1496	TI5010-1523	TI5910-2526	TI5510-2526	

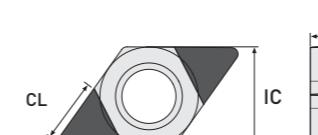	CL	IC	S	R	CL 2,00 mm 2-edge tipped	 CVD-D	 Ultra Diamond	 CBN-H	 CBN-X	 CBN-K
Iso Code	IC	S	R		Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>
DCGW 04T001	3,10	1,20	0,10		DP2010-0521	DP1110-1492	TI5010-1521	TI5910-2522	TI5510-2522	
DCGW 04T002	3,10	1,20	0,20		DP2010-0522	DP1110-1494	TI5010-1522	TI5910-2524	TI5510-2524	
DCGW 04T004	3,10	1,20	0,40		DP2010-0523	DP1110-1496	TI5010-1523	TI5910-2526	TI5510-2526	

### Application range:

-  CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...
-  Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...
-  CBN-H Steel hardened up to 72 HRC
-  CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...
-  CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...




 Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

 All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or  
in our online shop.


## E... SELPR/L 95°/10°

for inserts EPGW 0502...

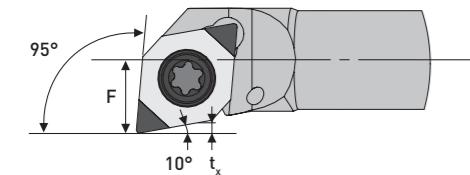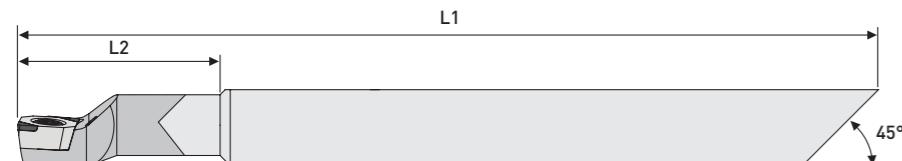

Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
8,00	4,50	20,00	100,00	8h6	0,80	right	E0608X SELPR 05	BW6060-0150
						left	E0608X SELPL 05	BW6060-0151
11,00	6,00	33,00	100,00	10h6	0,80	right	E0810X SELPR 05	BW6060-0152
						left	E0810X SELPL 05	BW6060-0153

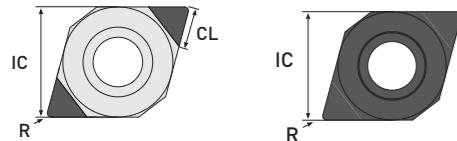

	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K			
Iso Code	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No. <small>New</small>			
EPGW 050201	5,56	2,38	0,10	DP2010-0531	DP1110-1400	TI5010-1531	TI5910-2550	TI5510-2550
EPGW 050202	5,56	2,38	0,20	DP2010-0532	DP1110-1402	TI5010-1532	TI5910-2552	TI5510-2552
EPGW 050204	5,56	2,38	0,40	DP2010-0533	DP1110-1404	TI5010-1533	TI5910-2554	TI5510-2554
EPGW 050201 FF	5,56	2,38	0,10			TI5030-0081	TI5930-0081	TI5530-0081
EPGW 050202 FF	5,56	2,38	0,20			TI5030-0082	TI5930-0082	TI5530-0082
EPGW 050204 FF	5,56	2,38	0,40			TI5030-0083	TI5930-0083	TI5530-0083

### Application range:




- CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...
- Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...
- CBN-H Steel hardened up to 72 HRC
- CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

Suitable clamping adapters can be found from page 36 onwards.

You will find further application ranges in the detailed overview from page 8.

## E... SRLCR/L 95°/10°

for inserts RCGW 0602...

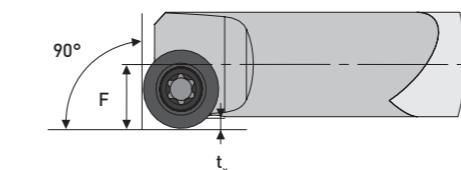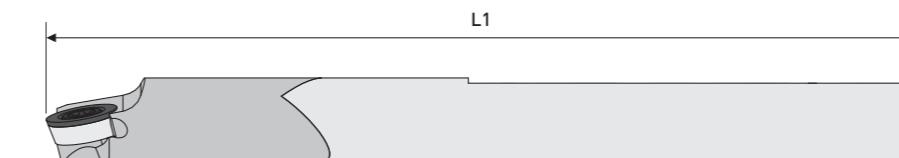

Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
10,00	5,00	-	125,00	8h6	1,00	right	E08X SRLCR 06	BW6060-1024
						left	E08X SRLCL 06	BW6060-1025

 Matching clamping screw: 01-BW9060-0005

 Matching clamping screw: 01-BW9060-0005

	FullFace	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K		
Iso Code	Item No.	Item No.	Item No.	Item No.	Item No.	Item No.		
RCGW 0602M0 FF	6,00	2,38	-	DP1030-0001	DP2030-0001	TI5030-0100	TI5930-0102	TI5530-0102




 Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

 All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or  
in our online shop.

## E... STXPR/L 62,5°/57,5°

for inserts TPGW 06T1...


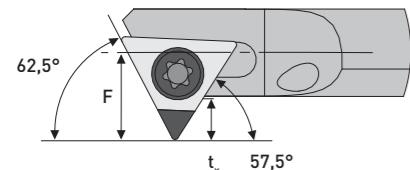
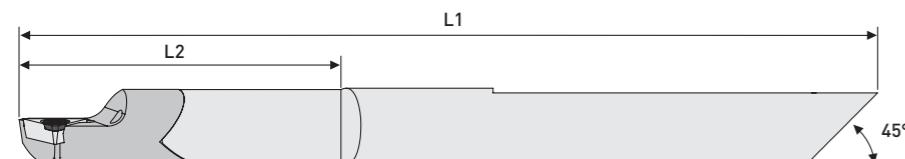


Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
8,00	4,50	40,00	100,00	6h6	2,50	right	E06X STXPR 06	BW6060-0126
						left	E06X STXPL 06	BW6060-0127

## E... SVXCR/L 5°/140°

for inserts VCGW 0501...

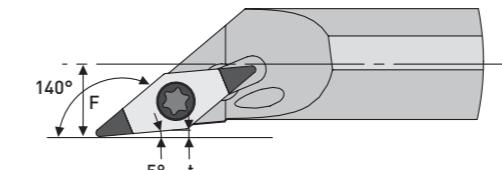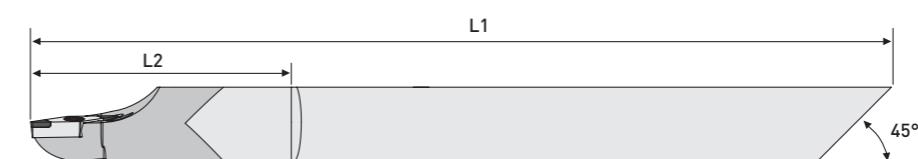

Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
8,00	3,00	26,00	80,00	8h6	0,40	right	E08X SVXCR 05 5°	BW6060-0180
						left	E08X SVXCL 05 5°	BW6060-0181

Matching clamping screw: 01-BW9060-0126

Matching clamping screw: 01-BW9060-0002

<b>Iso Code</b>	<b>IC</b>	<b>S</b>	<b>R</b>	<b>Item No.</b>	<b>Item No. <small>New</small></b>	<b>Item No.</b>
TPGW 06T101	3,97	1,98	0,10	DP2010-0671	DP1110-1410	TI5010-0786
TPGW 06T102	3,97	1,98	0,20	DP2010-0672	DP1110-1412	TI5010-0787
TPGW 06T104	3,97	1,98	0,40	DP2010-0673	DP1110-1414	TI5010-0788
TI5910-0786				TI5910-0786		TI5510-0786
TI5910-0787				TI5910-0787		TI5510-0787
TI5510-0788				TI5910-0788		TI5510-0788

<b>Iso Code</b>	<b>IC</b>	<b>S</b>	<b>R</b>	<b>Item No.</b>	<b>Item No. <small>New</small></b>	<b>Item No.</b>
VCGW 050101	3,10	1,59	0,10	DP2010-0561	DP1110-1498	TI5010-1561
VCGW 050102	3,10	1,59	0,20	DP2010-0562	DP1110-1500	TI5010-1562
VCGW 050104	3,10	1,59	0,40	DP2010-0563	DP1110-1502	TI5010-1563
TI5910-2528				TI5910-2528		TI5510-2528
TI5910-2530				TI5910-2530		TI5510-2530
TI5510-2532				TI5910-2532		TI5510-2532

### Application range:

- CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...
- Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...
- CBN-H Steel hardened up to 72 HRC
- CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

Suitable clamping adapters can be found from page 36 onwards.

You will find further application ranges in the detailed overview from page 8.

Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)


All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or  
in our online shop.

Subject to technical changes.

## E... SVXCR/L 113°/32°

for inserts VCGW 0501...

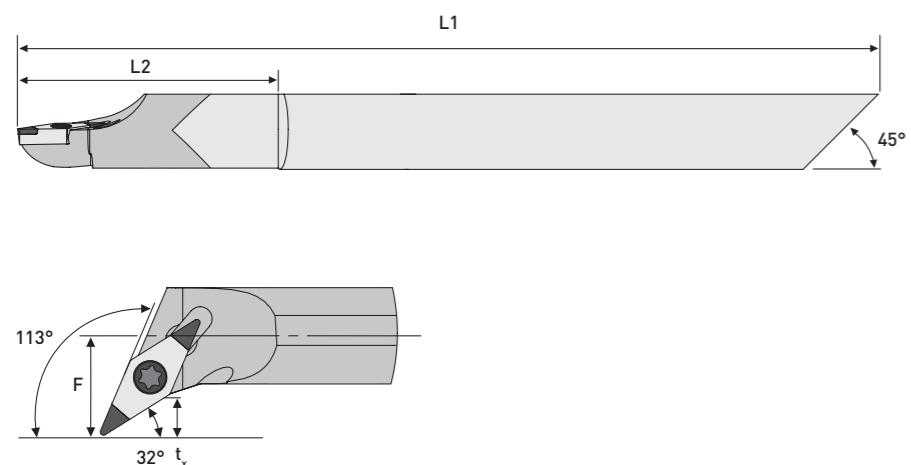

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
9,20	5,00	26,00	80,00	8h6	2,50	right	E08X SVXCR 05 113°	BW6060-0186
						left	E08X SVXCL 05 113°	BW6060-0187

Matching clamping screw: 01-BW9060-0002


Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>			
Iso Code	IC	S	R					
VCGW 050101	3,10	1,59	0,10	DP2010-0561	DP1110-1498	TI5010-1561	TI5910-2528	TI5510-2528
VCGW 050102	3,10	1,59	0,20	DP2010-0562	DP1110-1500	TI5010-1562	TI5910-2530	TI5510-2530
VCGW 050104	3,10	1,59	0,40	DP2010-0563	DP1110-1502	TI5010-1563	TI5910-2532	TI5510-2532

### Application range:

- CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...
- Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...
- CBN-H Steel hardened up to 72 HRC
- CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

## E... SVLCL/L 95°/50°

for inserts VCGW 0501...

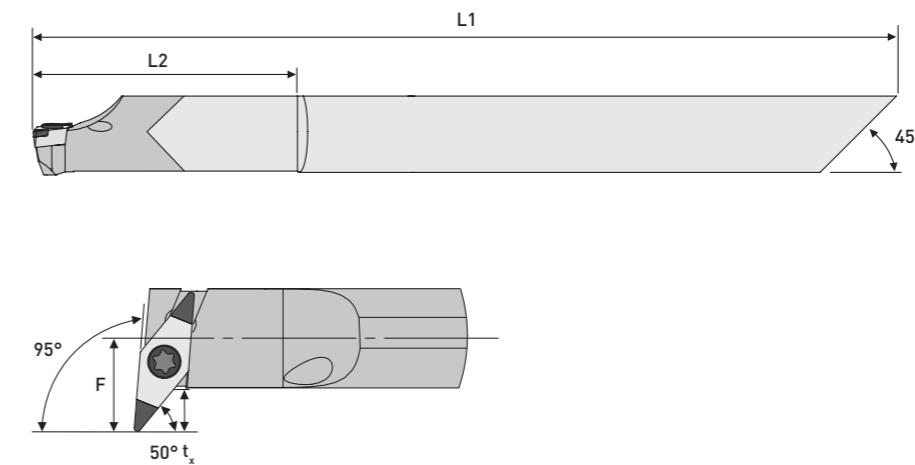

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
9,20	5,00	26,00	80,00	8h6	3,00	right	E08X SVLCL 05 95°	BW6060-0190
						left	E08X SVLCL 05	BW6060-0191

Matching clamping screw: 01-BW9060-0002

Item No.	IC	S	R					
Iso Code								
VCGW 050101	3,10	1,59	0,10	DP2010-0561	DP1110-1498	TI5010-1561	TI5910-2528	TI5510-2528
VCGW 050102	3,10	1,59	0,20	DP2010-0562	DP1110-1500	TI5010-1562	TI5910-2530	TI5510-2530
VCGW 050104	3,10	1,59	0,40	DP2010-0563	DP1110-1502	TI5010-1563	TI5910-2532	TI5510-2532




Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or  
in our online shop.

# E... SVVCR 72,5°/72,5°

for inserts VCGW 0501...


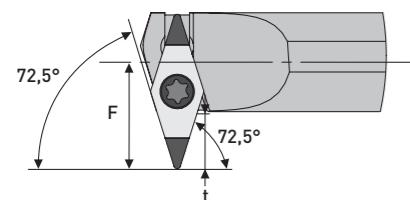
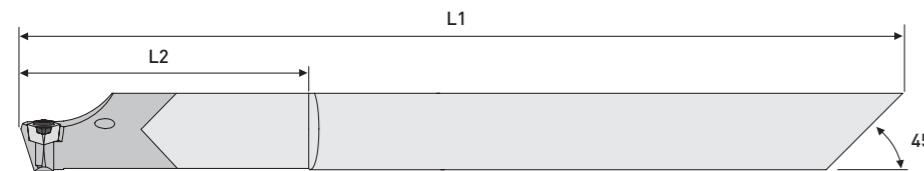


Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
10,00	5,50	26,00	80,00	8h6	3,50	right	E08X SVVCR 05	BW6060-0196

# E... SVLXR/L 50°/95° EX

for inserts VCGW 0501...

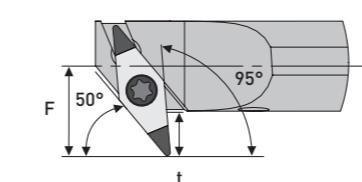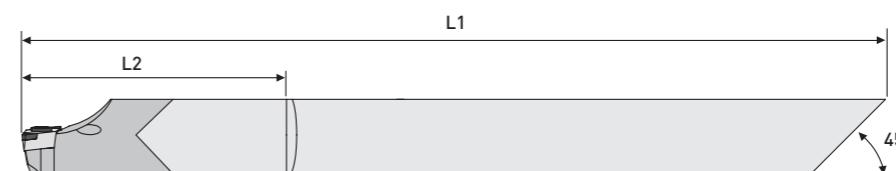

Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
9,20	5,00	26,00	80,00	8h6	3,00	right	E08X SVLXR 05	BW6060-0200
						left	E08X SVLXR 05	BW6060-0201

 Matching clamping screw: 01-BW9060-0002

 Matching clamping screw: 01-BW9060-0002

				CL	S	IC	CL 2,00 mm 2-edge tipped	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
Iso Code	IC	S	R	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	
VCGW 050101	3,10	1,59	0,10	DP2010-0561	DP1110-1498	TI5010-1561	TI5910-2528	TI5510-2528				
VCGW 050102	3,10	1,59	0,20	DP2010-0562	DP1110-1500	TI5010-1562	TI5910-2530	TI5510-2530				
VCGW 050104	3,10	1,59	0,40	DP2010-0563	DP1110-1502	TI5010-1563	TI5910-2532	TI5510-2532				

				CL	S	IC	CL 2,00 mm 2-edge tipped	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
Iso Code	IC	S	R	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	Item No.	Item No. <small>New</small>	
VCGW 050101	3,10	1,59	0,10	DP2010-0561	DP1110-1498	TI5010-1561	TI5910-2528	TI5510-2528				
VCGW 050102	3,10	1,59	0,20	DP2010-0562	DP1110-1500	TI5010-1562	TI5910-2530	TI5510-2530				
VCGW 050104	3,10	1,59	0,40	DP2010-0563	DP1110-1502	TI5010-1563	TI5910-2532	TI5510-2532				

#### Application range:

-  CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...
-  Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...
-  CBN-H Steel hardened up to 72 HRC
-  CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...
-  CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

Suitable clamping adapters can be found from page 36 onwards.

You will find further application ranges in the detailed overview from page 8.




 Special tools on request for you!  
Please send inquiries to [info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

 All our products are also available in the online shop.  
Visit us at [diamond-tools24.com](http://diamond-tools24.com)

You can find our complete holder program in our tool holder catalog or  
in our online shop.

# E... SWUCR/L 93°/7°

for inserts WCGW 0201...

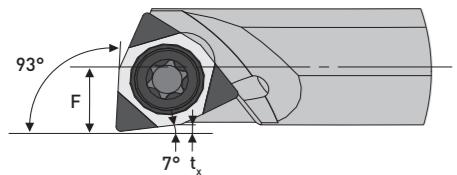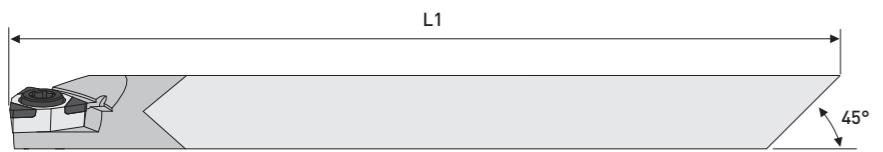


Carbide Tool Holder  
Figure shows right version

Dmin	F	L2	L1	D2	t <sub>x</sub>	Version	Iso Code	Item No.
5,80	2,90	-	100,00	5h6	0,25	right	E05X SWUCR 02	BW6060-0090
						left	E05X SWUCL 02	BW6060-0091
7,80	3,90	-	100,00	6h6	0,25	right	E06X SWUCR 02	BW6060-0094
						left	E06X SWUCL 02	BW6060-0095



Matching clamping screw: 01-BW9060-0012

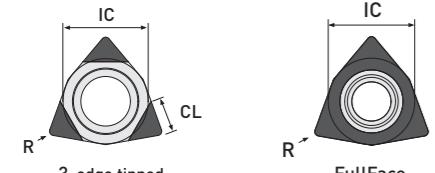

Item No.



Item No. New



Item No.



Item No. New



Item No. New

Iso Code	IC	S	R	CVD-D	Ultra Diamond	CBN-H	CBN-X	CBN-K
WCGW 020101	3,97	1,59	0,10	DP2010-0571	DP1110-1504	TI5010-1571	TI5910-2534	TI5510-2534
WCGW 020102	3,97	1,59	0,20	DP2010-0572	DP1110-1506	TI5010-1572	TI5910-2536	TI5510-2536
WCGW 020104	3,97	1,59	0,40	DP2010-0573	DP1110-1508	TI5010-1573	TI5910-2538	TI5510-2538
WCGW 020101 FF	3,97	1,59	0,10	DP2030-0117		TI5030-0201	TI5930-0202	TI5530-0202
WCGW 020102 FF	3,97	1,59	0,20	DP2030-0113		TI5030-0205	TI5930-0207	TI5530-0207
WCGW 020104 FF	3,97	1,59	0,40	DP2030-0114		TI5030-0210	TI5930-0212	TI5530-0212

## Application range:

- CVD-D Aluminum, Brass, Brass lead-free, Composites (CFRP, GFRP, MMC), Graphite, Titanium ...
- Ultra-Dia. Acrylic, Carbide < 10% Binder, Ceramics, Zirconium ...
- CBN-H Steel hardened up to 72 HRC
- CBN-X Tool Steel hardened up to 72 HRC, Tool Steel low alloy, Stellite, powder metallurgical Steel ...
- CBN-K Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

## Your Notes

# Clamping Systems

Hydraulic Expansion Chuck

## Take advantage!


- ✓ High damping
- ✓ Tool life increase up to approximately 30%
- ✓ Automatic cutting edge adjustment
- ✓ Excellent surface quality
- ✓ High dimensional stability
- ✓ Easy and quick change of the boring bar

## Functionality

Automatic adjustment of center height through pin, resulting in a very high repeat accuracy

This gives you a very high repeat accuracy.

 Cooling through the clamping surface

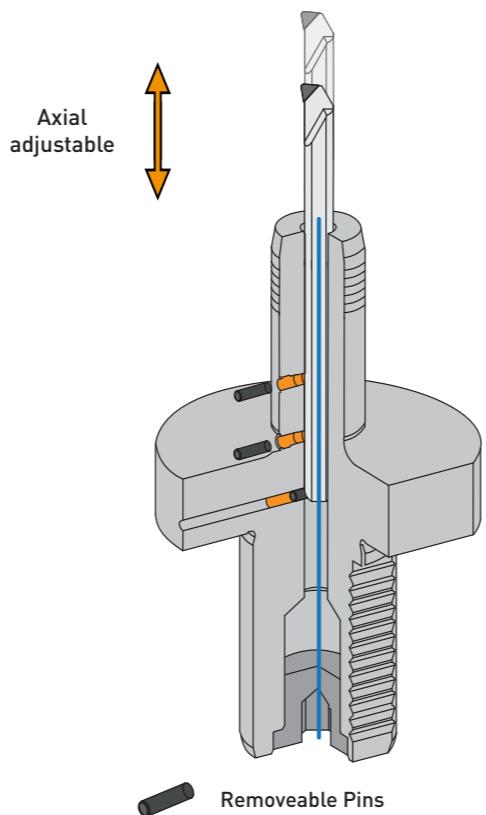

## Adjustment Guide


for tool change

1. Loosen screw 4
2. Insert boring bar
3. Turn tool slightly at stop until resistance is felt
4. Tighten screw 4 with max. 10Nm

-> Tool ready for use

## Extended length too long?

1. Loosen screw 4
2. Remove threaded pin 1 (if necessary 2 also)
3. Remove alignment pin
4. Insert threaded pin 1 (if necessary 2 also)
5. Repeat adjustment guide from point 2

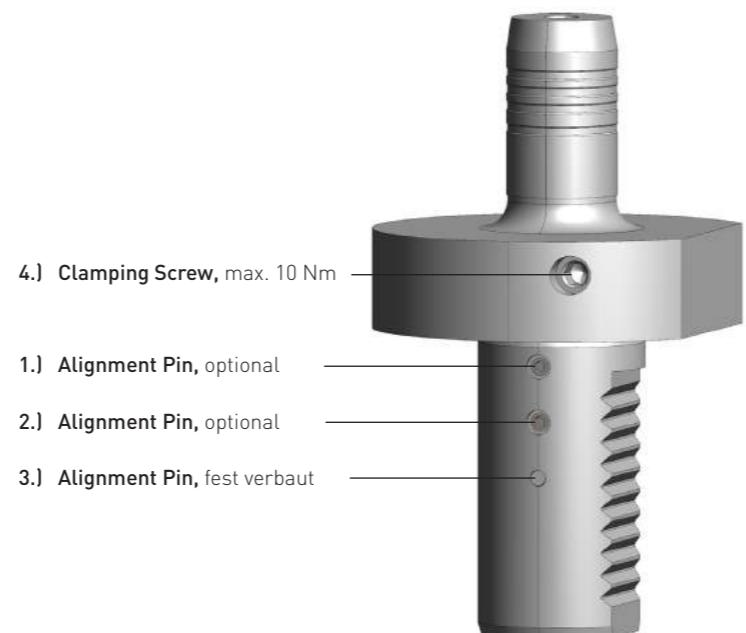

\*Positioning of alignment pins may deviate due to manufacturing process

# Clamping Systems



Clamping Adapter round or 4-sided

## Take advantage!

- ✓ Excellent surface quality
- ✓ High dimensional stability
- ✓ High repeat accuracy

## Functionality

- ✓ Automatic adjustment of center height through pin and 45° bevel on the tool
- ✓ Safe and stable positioning of the tool due to the 3-point fixing system
- ✓ Defined coolant supply 
- ✓ Adapter with shank tolerance Ø16h6

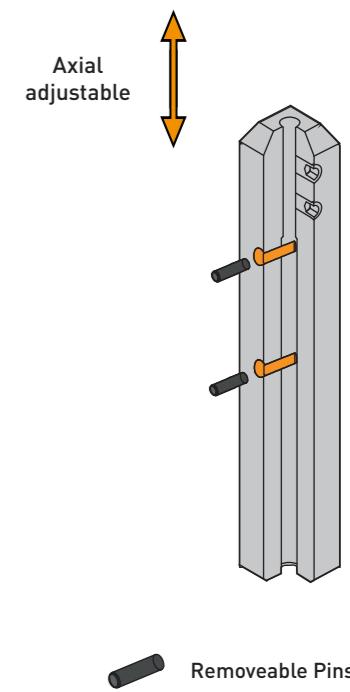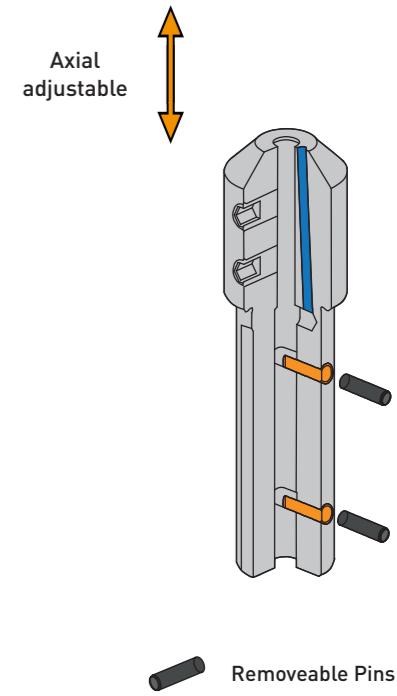


## Functionality

- ✓ Automatic adjustment of center height through pin and 45° bevel on the tool
- ✓ Safe and stable positioning of the tool due to the 3-point fixing system
- ✓ Grinded 4-sided for flexible use in almost all processing machines
- ✓ General coolant supply through clamping surface 

# Hydraulic Expansion Chuck

with VDI

for brazed boring tools

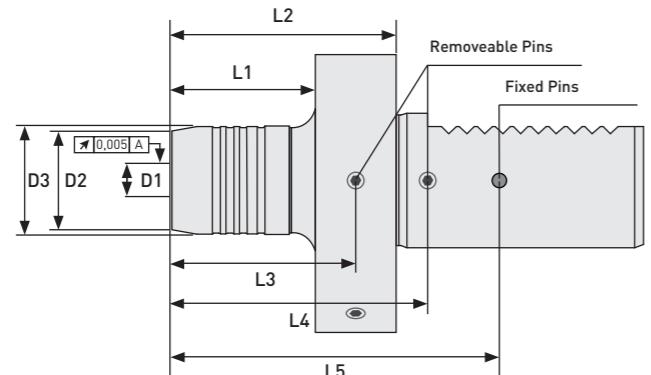


D1	VDI	D2	D3	L1	L2	L3	L4	L5	Item No.
4,00	16	18,00	20,00	33,00	58,00	46,00	54,00	62,00	BA7090-2040
	20	18,00	20,00	32,00	50,00	46,00	54,00	62,00	BA7090-2240
	25	18,00	20,00	32,00	50,00	46,00	54,00	62,00	BA7090-2245
	30	18,00	20,00	32,00	50,00	46,00	54,00	62,00	BA7090-2340
	40	18,00	20,00	58,00	76,00	46,00	54,00	62,00	BA7090-2440
5,00	16	18,00	20,00	51,00	76,00	62,00	72,00	82,00	BA7090-2050
	20	18,00	20,00	48,00	66,00	62,00	72,00	82,00	BA7090-2250
	25	18,00	20,00	48,00	66,00	62,00	72,00	82,00	BA7090-2255
	30	18,00	20,00	38,00	56,00	62,00	72,00	82,00	BA7090-2350
	40	18,00	20,00	56,00	76,00	62,00	72,00	82,00	BA7090-2450
6,00	16	18,00	20,00	45,00	71,00	55,00	67,00	79,00	BA7090-2060
	20	18,00	20,00	42,00	60,00	55,00	67,00	79,00	BA7090-2260
	25	18,00	20,00	42,00	60,00	55,00	67,00	79,00	BA7090-2265
	30	18,00	20,00	42,00	60,00	55,00	67,00	79,00	BA7090-2360
	40	18,00	20,00	58,00	76,00	55,00	67,00	79,00	BA7090-2460
8,00	16	22,00	24,00	37,00	62,00	41,00	57,00	73,00	BA7090-2080
	20	22,00	24,00	35,00	53,00	41,00	57,00	73,00	BA7090-2280
	25	22,00	24,00	34,00	52,00	41,00	57,00	73,00	BA7090-2285
	30	22,00	24,00	32,00	50,00	41,00	57,00	73,00	BA7090-2380
	40	22,00	24,00	60,00	80,00	41,00	57,00	73,00	BA7090-2480

Spare parts and torque wrench available on request.

# Hydraulic Expansion Chuck

with VDI

for boring tools with indexable inserts

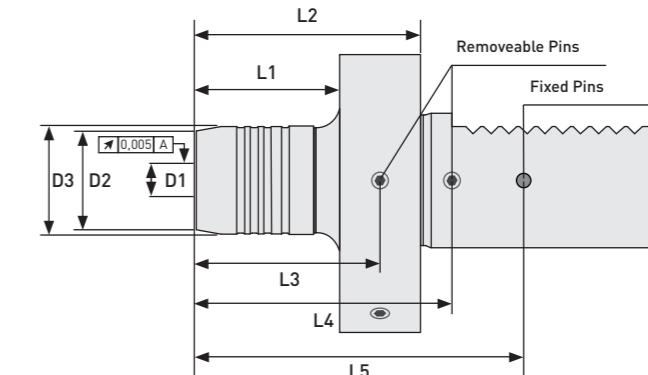



D1	VDI	D2	D3	L1	L2	L3	L4	L5	Item No.	
4,00	16	18,00	20,00	40,00	65,00	52,00	60,00	68,00	BA7090-3140	
	20	18,00	20,00	30,00	48,00	52,00	60,00	68,00	BA7090-3240	
	5,00	16	18,00	20,00	51,00	76,00	62,00	72,00	82,00	BA7090-3150
	20	18,00	20,00	48,00	66,00	62,00	72,00	82,00	BA7090-3250	
	6,00	16	18,00	20,00	45,00	71,00	55,00	67,00	79,00	BA7090-3160
	20	18,00	20,00	42,00	60,00	55,00	67,00	79,00	BA7090-3260	
	8,00	16	22,00	24,00	37,00	62,00	41,00	57,00	73,00	BA7090-3180
	16	22,00	24,00	17,00	42,00	22,00	38,00	54,00	BA7090-3181	
	16	22,00	24,00	62,00	87,00	67,00	83,00	99,00	BA7090-3182	
	20	22,00	24,00	27,00	45,00	22,00	38,00	54,00	BA7090-3280	
10,00	20	22,00	24,00	35,00	53,00	51,00	57,00	73,00	BA7090-3281	
	20	22,00	24,00	57,00	75,00	67,00	83,00	99,00	BA7090-3282	
	20	24,00	26,00	87,00	105,00	77,00	97,00	117,00	BA7090-3911	
	25	24,00	26,00	72,00	90,00	77,00	97,00	117,00	BA7090-3913	
	30	26,00	28,00	32,00	50,00	37,00	57,00	77,00	BA7090-3915	

Spare parts and torque wrench available on request.

Subject to technical changes.



## Clamping Adapter

optional with or without internal cooling

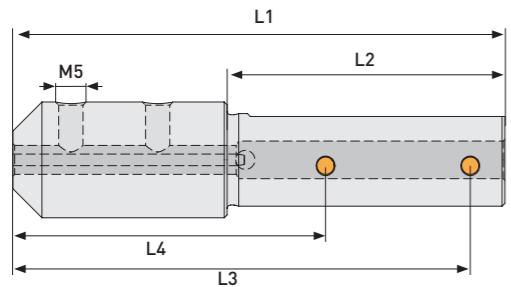

without internal cooling (light cooling through clamping surface)

D1	D2	D3	L1	L2	L3	L4	Item No.
3G6	16h6	20,00	75,00	48,00	64,00	34,00	BA7090-0000
4G6	16h6	20,00	75,00	48,00	64,00	34,00	BA7090-0001
5G6	16h6	20,00	85,00	48,00	79,00	49,00	BA7090-0002
6G6	16h6	20,00	84,00	48,00	78,00	48,00	BA7090-0003
8G6	16h6	20,00	82,00	48,00	77,00	47,00	BA7090-0004

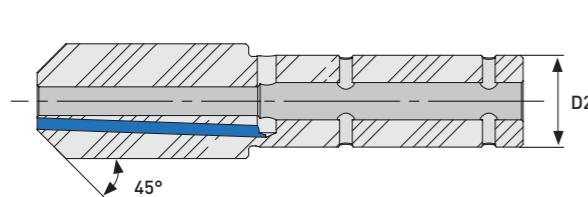



with internal cooling

D1	D2	D3	L1	L2	L3	L4	Version	Item No.
4G6	16h6	20,00	75,00	48,00	64,00	39,00	right	BA7090-1001
							left	BA7090-2001
5G6	16h6	20,00	85,00	48,00	79,00	79,00	right	BA7090-1002
							left	BA7090-2002
6G6	16h6	20,00	84,00	48,00	78,00	78,00	right	BA7090-1003
							left	BA7090-2003
8G6	16h6	20,00	82,00	48,00	77,00	77,00	right	BA7090-1004
							left	BA7090-2004

Spare parts and torque wrench available on request.

## Clamping Adapter

4-sided

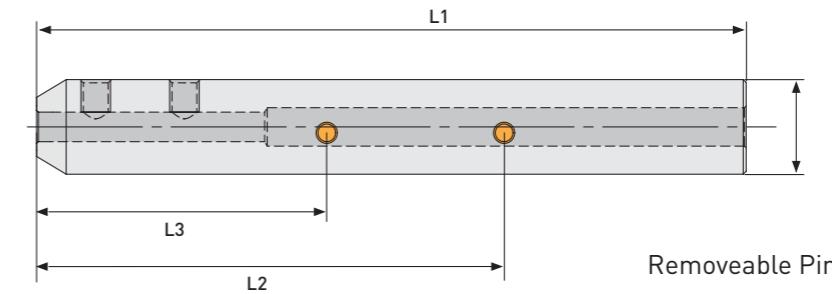

without internal cooling (light cooling through clamping surface)

D1	D2	L1	L2	L3	Item No.	
4G6	12x12	120,00	64,06	39,06	BA7090-4040	
	16x16	120,00	64,06	39,06	BA7090-4140	
	20x20	120,00	64,06	39,06	BA7090-4240	
	25x25	120,00	64,06	39,06	BA7090-4340	
5G6	12x12	120,00	79,06	49,06	BA7090-4050	
	16x16	120,00	79,06	49,06	BA7090-4150	
	20x20	120,00	79,06	49,06	BA7090-4250	
	25x25	120,00	79,06	49,06	BA7090-4350	
6G6	16x16	120,00	78,06	48,06	BA7090-4160	
	20x20	120,00	78,06	48,06	BA7090-4260	
	25x25	120,00	78,06	48,06	BA7090-4360	
	8G6	16x16	120,00	77,06	47,06	BA7090-4180
		20x20	120,00	77,06	47,06	BA7090-4280
		25x25	120,00	77,06	47,06	BA7090-4380

Spare parts and torque wrench available on request.

## Cutting Parameters

for our Boring Tools



Material		PCD									
		n [rev/min]			a <sub>p</sub> [mm]			F [mm/rev]			
		Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	
Acrylic (PMMA)	min.	5.000	4.500	3.500	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	20.000	20.000	20.000	0,05	0,80	2,00	0,05	0,10	0,12	
Al Si <10%	min.	5.000	4.000	3.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	20.000	20.000	20.000	0,30	1,50	2,50	0,05	0,10	0,18	
Al Si >10%	min.	5.000	5.000	3.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	20.000	20.000	20.000	0,20	1,00	2,00	0,05	0,10	0,18	
Brass, Brass, lead-free	min.	4.000	3.500	2.500	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	15.000	15.000	15.000	0,30	1,50	2,50	0,05	0,10	0,18	
Carbide, Ceramics, Green	min.	on request									
	max.										
CFRP	min.	5.000	3.000	2.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	15.000	12.000	10.000	0,10	0,50	2,00	0,05	0,10	0,15	
Copper	min.	4.000	3.500	3.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	20.000	20.000	20.000	0,10	0,50	1,00	0,05	0,10	0,15	
GFRP	min.	5.000	4.000	3.500	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	15.000	15.000	12.000	0,05	0,50	1,00	0,05	0,10	0,12	
Gold, Silver, Platinum	min.	4.000	3.000	2.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	15.000	15.000	15.000	0,10	0,50	1,00	0,05	0,10	0,15	
Graphite	min.	3.000	2.500	2.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	15.000	16.000	12.000	0,10	0,50	2,50	0,05	0,15	0,2	
MMC	min.	5.000	3.000	2.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	15.000	12.000	10.000	0,10	0,50	2,00	0,05	0,10	0,15	
Plastics	min.	4.000	3.500	3.000	0,02	0,01	0,01	0,01	0,01	0,01	0,01
	max.	18.000	15.000	15.000	0,10	1,00	2,50	0,05	0,10	0,20	
Titanium	min.	4.000	3.500	2.000	0,010	0,01	0,01	0,01	0,01	0,01	0,01
	max.	10.000	8.000	6.000	0,025	0,05	0,10	0,05	0,06	0,08	
Zirconium	min.	5.000	4.000	3.000	0,01	0,01	0,01	0,01	0,01	0,01	0,01
	max.	20.000	20.000	20.000	0,30	1,50	2,50	0,05	0,10	0,2	

CVD-D														
n [rev/min]			a <sub>p</sub> [mm]			F [mm/rev]			Cooling					
Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	Dry	Air	Emulsion	Oil	MQL	
4000	3500	2500	0,01	0,01	0,01	0,01	0,01	0,01		2. Choice	1. Choice			
30000	25000	22000	0,05	0,80	2,00	0,05	0,10	0,12		2. Choice	1. Choice			
4500	4000	2000	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice	2. Choice		
30000	30000	30000	0,30	1,50	2,50	0,05	0,10	0,18			1. Choice	2. Choice		
4500	4000	2000	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice	2. Choice		
30000	30000	30000	0,20	1,00	2,00	0,05	0,10	0,18			1. Choice	2. Choice		
3000	2500	1500	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice	1. Choice		
20000	20000	18000	0,30	1,50	2,50	0,05	0,10	0,18			1. Choice	1. Choice		
on request									on request					
4000	3000	1000	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice			
20000	18000	15000	0,10	0,50	2,00	0,05	0,10	0,15			1. Choice			
3000	2500	2000	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice	2. Choice		
30000	25000	20000	0,10	0,50	1,00	0,05	0,10	0,15			1. Choice	2. Choice		
4000	3000	1500	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice			
20000	20000	18000	0,05	0,50	1,00	0,05	0,10	0,12			1. Choice			
3000	2500	1000	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice	2. Choice		
20000	20000	18000	0,10	0,50	1,00	0,05	0,10	0,15			1. Choice	2. Choice		
2000	1500	1000	0,01	0,01	0,01	0,01	0,01	0,01	1. Choice					
20000	18000	15000	0,10	0,50	2,50	0,05	0,15	0,20	1. Choice					
4000	3000	1000	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice			
20000	15000	15000	0,10	0,50	2,00	0,05	0,10	0,15			1. Choice			
3000	2500	2000	0,02	0,01	0,01	0,01	0,01	0,01			1. Choice			
20000	20000	18000	0,10	1,00	2,50	0,05	0,10	0,20			1. Choice			
3500	2000	1200	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice			
12000	8000	6000	0,025	0,05	0,10	0,05	0,06	0,08			1. Choice			
4000	3000	2000	0,01	0,01	0,01	0,01	0,01	0,01			1. Choice	2. Choice		
30000	30000	30000	0,30	1,50	2,50	0,05	0,10	0,20			1. Choice	2. Choice		

# Cutting Parameters

for our Boring Tools

Material		CBN								
		n [rev/min]			a <sub>p</sub> [mm]			F [mm/rev]		
		Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0	Ø1,0-3,5	Ø4,0-6,0	Ø7,0-10,0
Carbide >20%Co	min.	on request								
	max.									
Carbide-Steel Composite	min.	on request								
	max.									
Ni-, Co-, Fe- and Cr-Alloys	min.	2.000	1.500	1.000	0,02	0,025	0,025	0,01	0,02	0,03
	max.	8.000	6.000	5.000	0,05	0,30	0,5	0,05	0,10	0,20
Steel hardened up to 42 HRC	min.	3.000	3.000	2.000	0,01	0,01	0,01	0,004	0,005	0,005
	max.	12.000	10.000	8.000	0,025	0,20	0,50	0,008	0,08	0,18
Steel hardened up to 52 HRC	min.	3.000	3.000	2.000	0,01	0,01	0,01	0,004	0,005	0,005
	max.	12.000	10.000	8.000	0,025	0,20	0,50	0,008	0,08	0,18
Steel hardened up to 60 HRC	min.	3.000	2.500	2.000	0,01	0,01	0,01	0,004	0,005	0,005
	max.	10.000	8.000	8.000	0,025	0,20	0,50	0,008	0,10	0,18
Steel hardened up to 68 HRC	min.	2.500	2.000	1.500	0,01	0,01	0,01	0,004	0,005	0,005
	max.	8.000	6.000	6.000	0,025	0,15	0,3	0,03	0,12	0,15
Special Alloys (ASP, CPM, HARDOX)	min.	2.000	2.000	1.500	0,01	0,01	0,01	0,004	0,005	0,005
	max.	8.000	6.000	6.000	0,025	0,015	0,30	0,03	0,12	0,15
Titanium	min.	2.000	1.500	1.000	0,01	0,03	0,05	0,01	0,02	0,03
	max.	10.000	8.000	6.000	0,015	0,15	0,25	0,05	0,06	0,08
Tool Steel, hardened	min.	2.000	2.200	2.500	0,02	0,02	0,02	0,01	0,02	0,03
	max.	8.000	6.000	6.000	0,05	0,30	0,40	0,05	0,10	0,20

## Cooling recommended

In machining with CBN inserts, proper cooling is a key to successful machining.

Here you will find our recommendation:

When machining interrupted cuts, we recommend dry machining or cooling by air.

Material	Cooling				
	Dry	Air	Emulsion	Oil	MQL
Carbide >20%Co	on request				
Ni-, Co-, Fe- and Cr-Alloys		3. Choice	1. Choice		2. Choice
Steel hardened up to 42 HRC		3. Choice	1. Choice	2. Choice	
Steel hardened up to 52 HRC		3. Choice	1. Choice	2. Choice	
Steel hardened up to 60 HRC		3. Choice	1. Choice	2. Choice	
Steel hardened up to 68 HRC		3. Choice	1. Choice	2. Choice	
Special Alloys (ASP, CPM, HARDOX)		3. Choice	1. Choice	2. Choice	
Titanium		1. Choice			2. Choice
Tool Steel hardened	3. Choice	1. Choice	2. Choice		



If you have any further technical questions, please do not hesitate to contact us


by phone or e-mail!

Phone: +49(0)6301 32011-0

Mail: info@diamond-toolingsystems.com

# Formulas

Turning

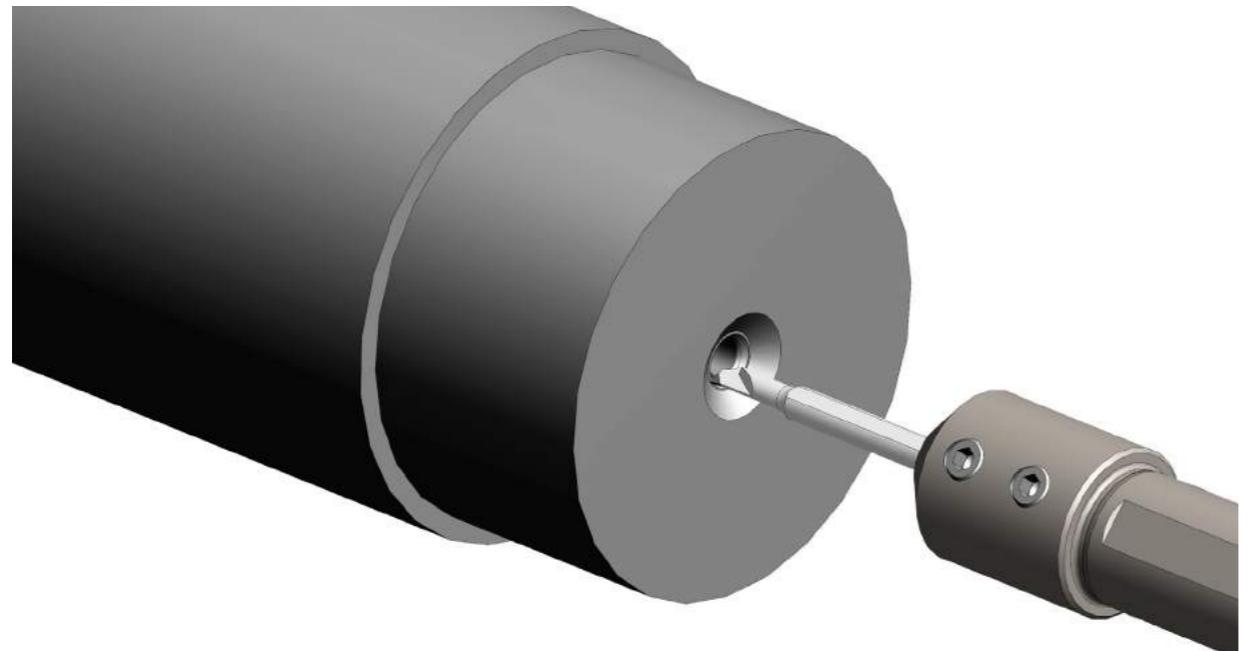

$V_f$	Feed rate	mm/min
$f_n$	Feed per revolution	mm/rev
$n$	Spindle speed	rev/min
$v_c$	Cutting speed	m/min
$D_c$	Cutter diameter	mm
$t_c$	Cutting Time	min
$l_m$	Cutting length	mm
$Q$	Stock removal rate	cm³/min
$a_p$	Cutting depth	mm

## ► Cutting speed

$$v_c = \frac{D_c \times \pi \times n}{1000} \quad [\text{m/min}]$$

## ► Spindle speed

$$n = \frac{v_c \times 1000}{\pi \times D_c} \quad [\text{rev/min}]$$

## ► Feed per revolution

$$f_n = \frac{V_f}{n} \quad [\text{mm/rev}]$$


## ► Cutting time

$$t_c = \frac{l_m}{f_n \times n} \quad [\text{min}]$$

## ► Stock removal rate


$$Q = v_c \times a_p \times f_n \quad [\text{cm}^3/\text{min}]$$

# Your Notes

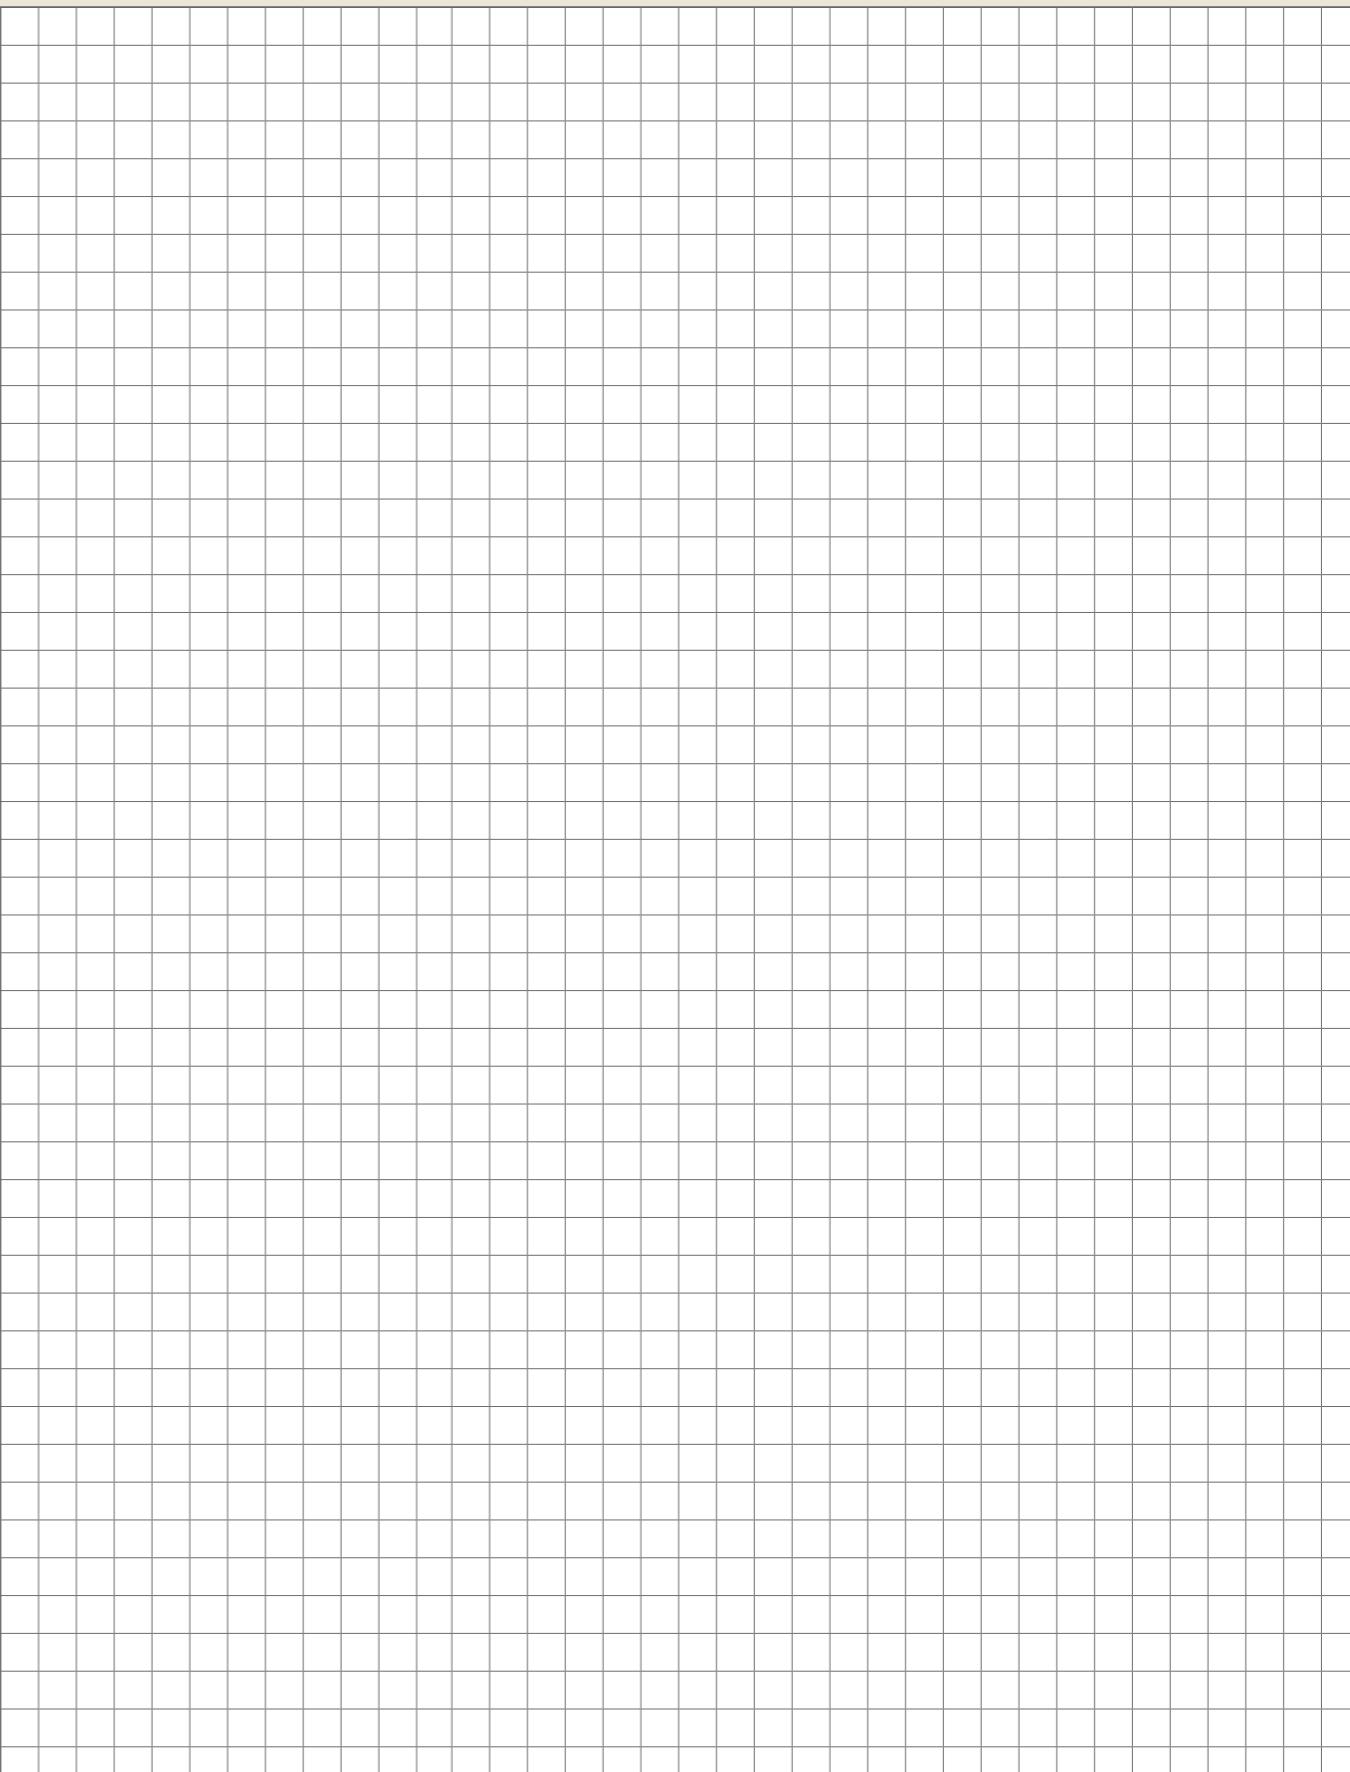


**Your Notes**

---

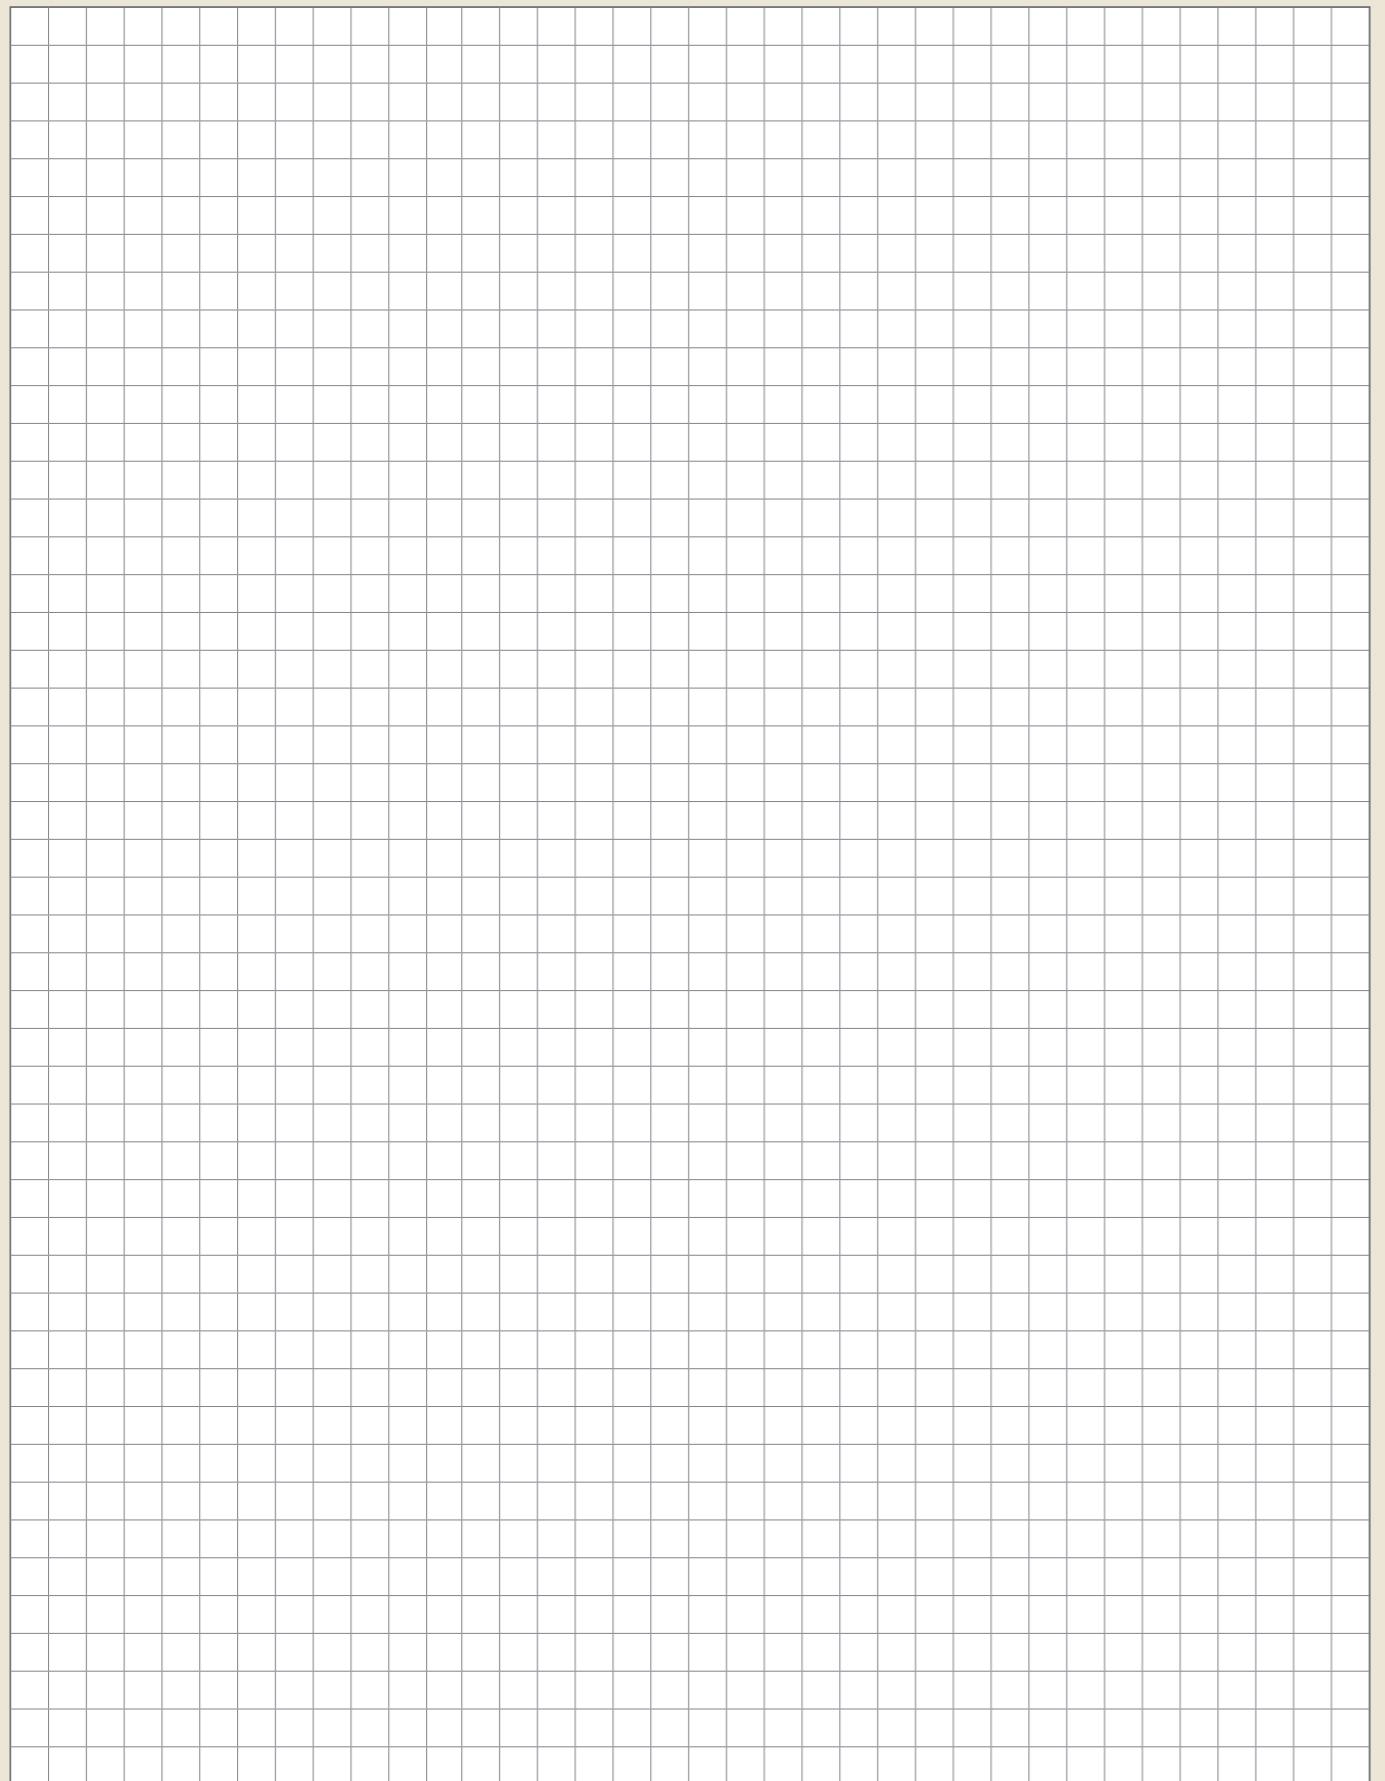


A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.

**Your Notes**

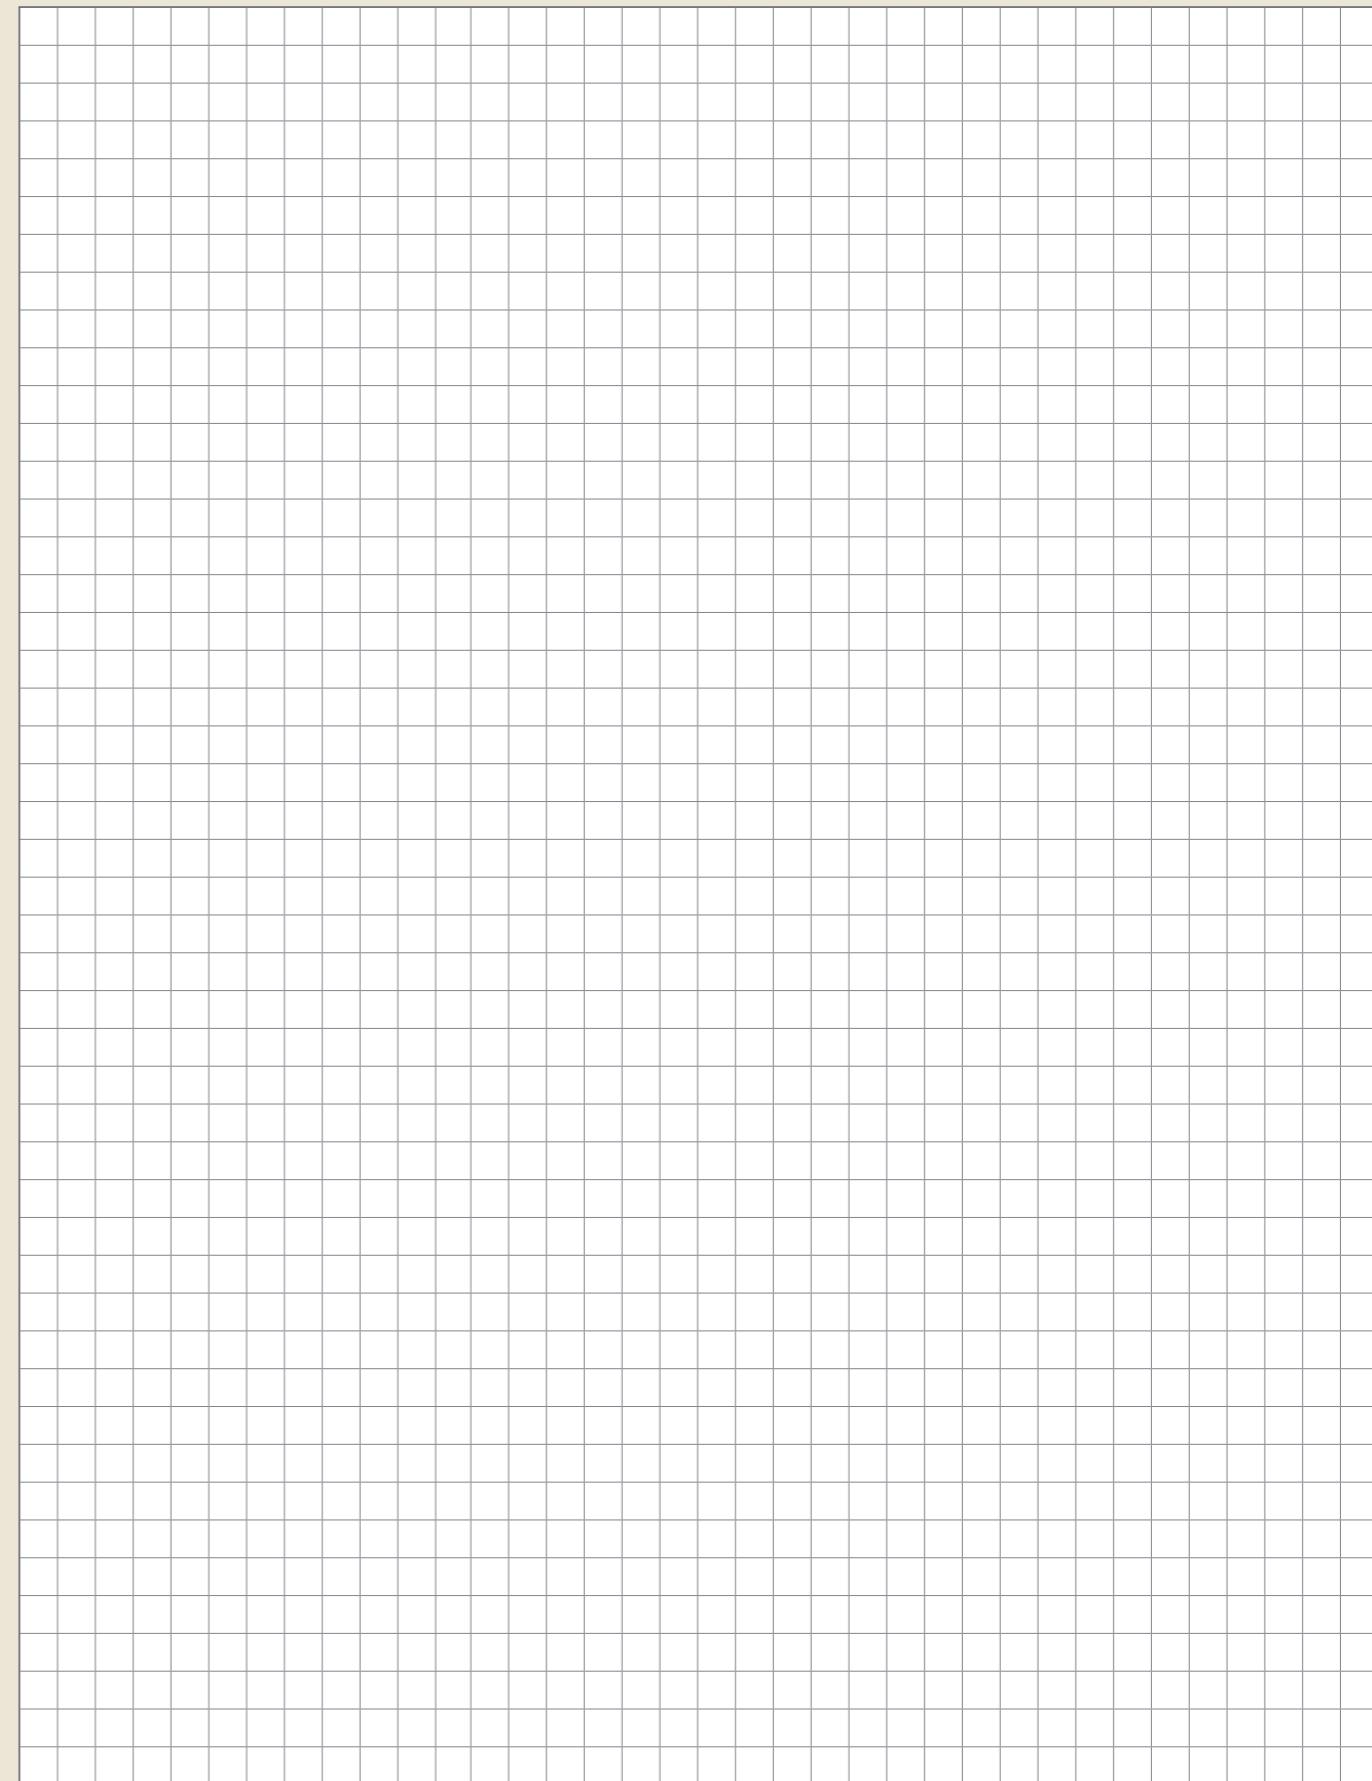

A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.

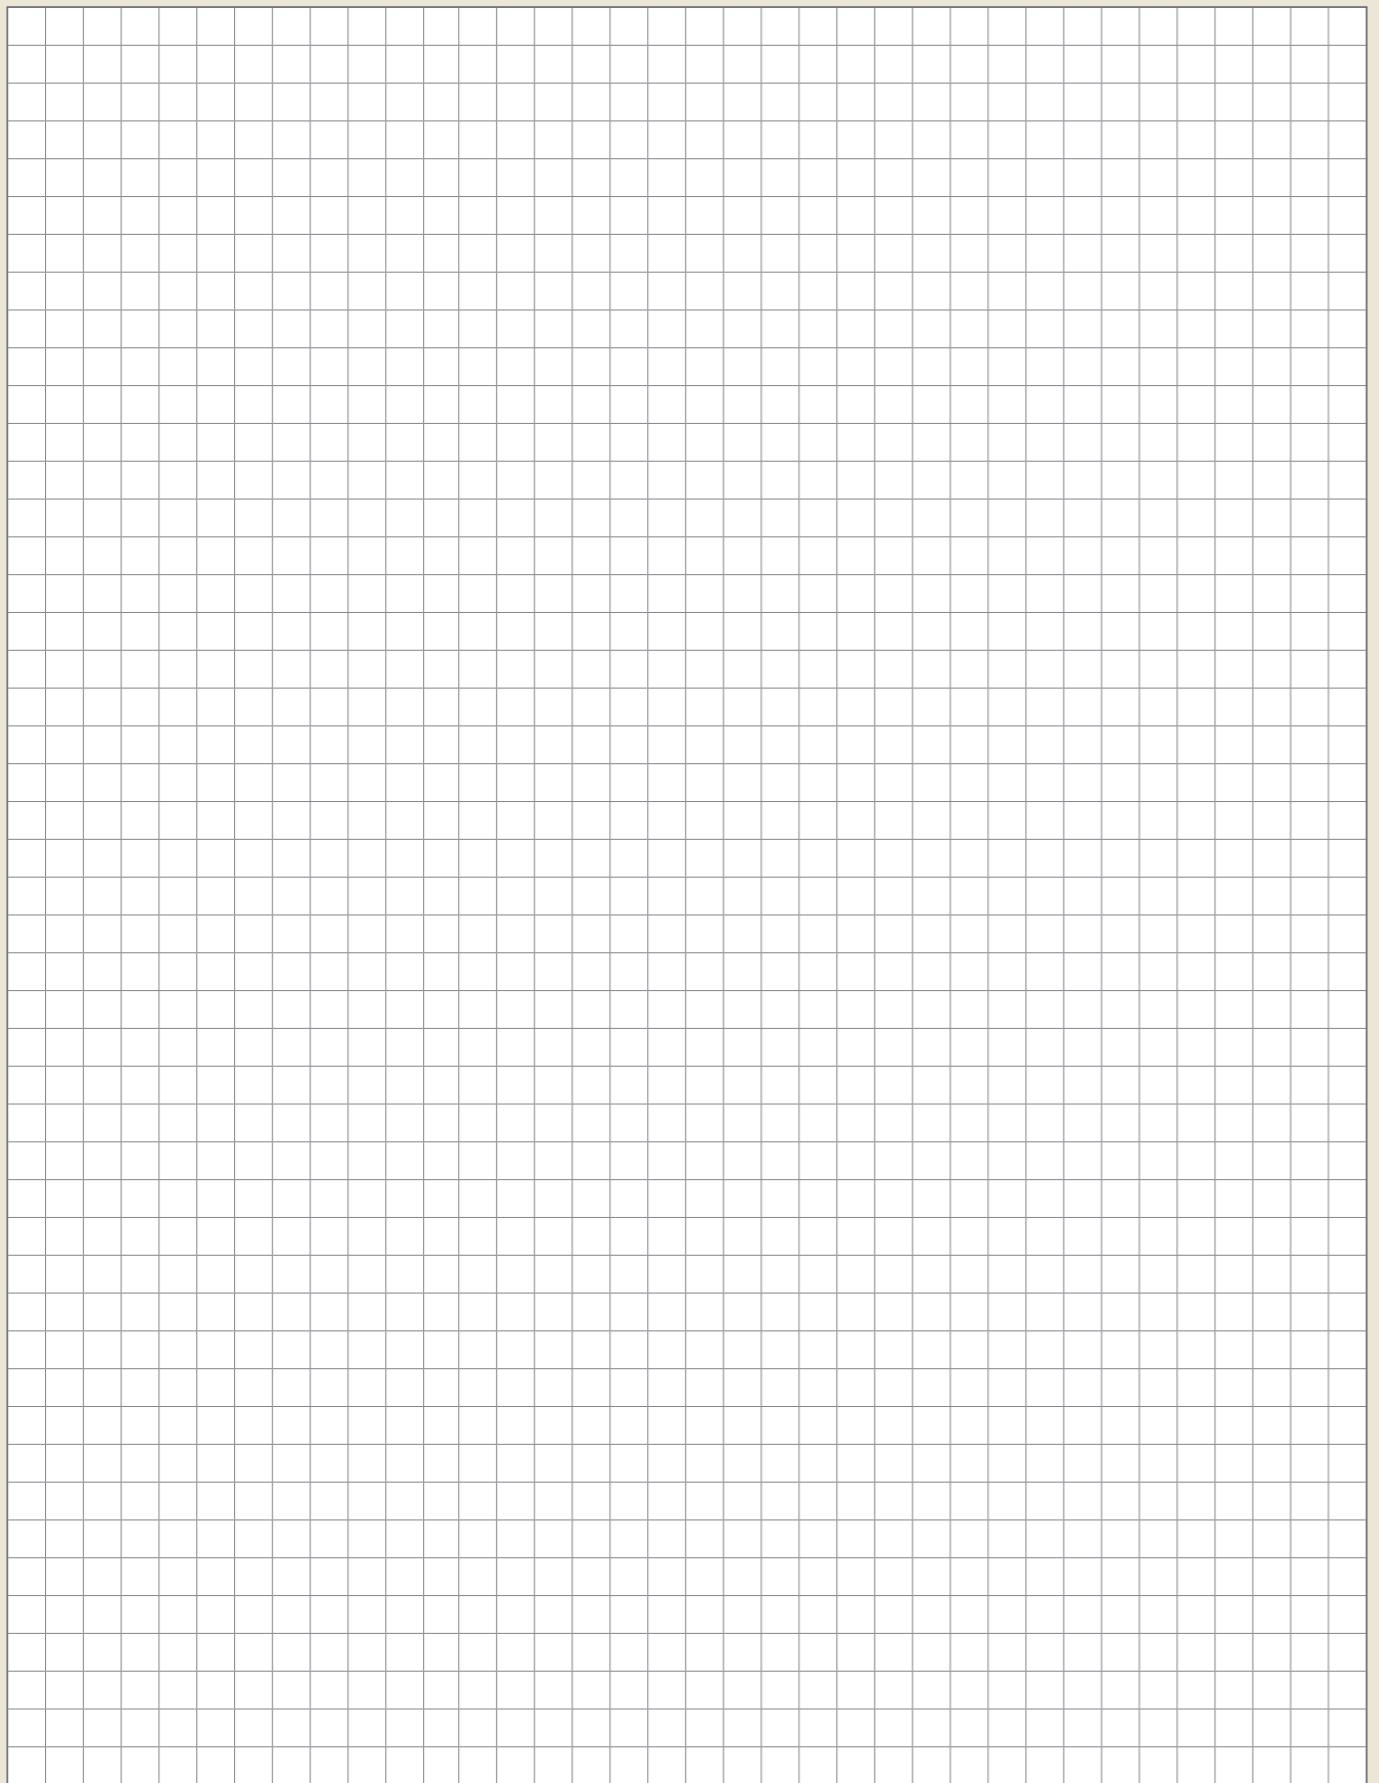

### Copyright:


The reprint of our catalogs, copies of our flyers and newsletters or only excerpts such as illustrations, designs, technical information and design require the written permission of DTS GmbH. Copies or only excerpts such as illustrations, designs, technical information from our homepage and our online store are only permitted with the written consent of DTS GmbH.

All rights are reserved. Errors, misprints or printing errors do not entitle to claims. The pictorial and graphic representation of our tools do not necessarily have to correspond to the actual tool in all details.

We reserve the right to make production-related technical changes and changes to the delivery program. The cutting values given are guide values which must be adjusted according to the process environment.

### Safety Instructions:

- ▶ DTS tools equipped with ultra-hard cutting edges are very sharp laser cut tools.
- ▶ Careful handling of the tools during unpacking and their use is recommended.
- ▶ Wearing protective gloves reduces the risk of injury.
- ▶ Material chipping and tool breakage may occur during machining, wearing safety glasses is recommended.
- ▶ Balanced holders are recommended for speeds above 10,000 rpm.
- ▶ We do not accept any responsibility for tools that have been modified, reground or used incorrectly and beyond their normal service life.
- ▶ Protective goggles are recommended when using DTS tools, sparks may also occur, make sure that no fire can occur.



PASSION FOR DIAMOND



Hans-Geiger-Straße 11a · D-67661 Kaiserslautern

+49 (0) 6301 32011-0  
+49 (0) 6301 32011-90

[info@diamond-toolingsystems.com](mailto:info@diamond-toolingsystems.com)

Homepage: [www.diamond-toolingsystems.com](http://www.diamond-toolingsystems.com)

Shop: [www.diamond-tools24.com](http://www.diamond-tools24.com)